

# Adding Reserves by Evaluating Turbidite Channel Reservoirs of Shahejie Formation of Paleogene in Beidagang Structural Belt, Bohaiwan Basin, China\*

Zhou Lyu<sup>1</sup>, Li Li<sup>2</sup>, Xiulin Hou<sup>2</sup>, and Wenqi Zhang<sup>2</sup>

Search and Discovery Article #11073 (2018)\*\*

Posted May 14, 2018

\*Adapted from extended abstract prepared in conjunction with poster presentation given at AAPG 2017 Asia Pacific Region Technical Symposium, Hidden Potential in Mature Basins: Play Analogs and Best Practices, Bandung, Indonesia, September 13-14, 2017

\*\*Datapages © 2018 Serial rights given by author. For all other rights contact author directly.

<sup>1</sup>Research Institute of Petroleum Exploration and Development, PetroChina, China ([lvzhou827@163.com](mailto:lvzhou827@163.com))

<sup>2</sup>Research Institute of Petroleum Exploration and Development, PetroChina, China

## Abstract

In the Bohaiwan Basin, many of the fields found in shallow formations (burial depth < 3000 m) have reached maturity. Reserve additions in these mature fields have mainly resulted from switching exploration target to deeper formations (> 3000 m). Among the reservoirs of deep formations in the Bohaiwan Basin, the turbidite channel reservoirs are widely distributed and have great potential for hydrocarbon exploration and production. However, exploitation of these turbidite channel reservoirs is limited by: 1) the difficulties in reservoir characterization of the turbidite channel sands due to rapid facies variation, and 2) the fuzziness of bypassed pay identification from the conventional log in these reservoirs because of the regional variations in formation water salinity and complex pore network.

In this study, characterization of the turbidite channel reservoirs is based on high resolution 3D seismic data and was calibrated by cores and logs. Additionally, the bypassed pay zones of these reservoirs in the study area were identified and evaluated by well-logs, combining with the analysis of core and well testing.

We aimed to provide classification of rock types and description of sand body geometry in the subsurface to facilitate a better understanding for characterization of turbidite channel reservoirs of the Shahejie Formation in the Beidagang Structural Belt. Firstly, we developed the sequence stratigraphic framework by detailed stratigraphic analysis of integrated data sets including 3D seismic data, well logs, and core. Secondly, we identified four different rock types based on the compositional characteristics and flow properties ([Figure 1](#)). The data used in this study were mainly from core observation, XRD data, and relative permeability from displacement experiments. Finally, based on the analysis of seismic attributes and core-calibrated logs, facies model was developed that can help characterize the distribution and geometry of turbidite channel sands. The main facies are turbidite channel, channel margin, slump, and mudstones. Each has a typical logging feature ([Figure 1](#) and [Figure 2](#)). We also analyzed the interconnectivity of reservoirs, which could help to map the horizontal and vertical barriers.

We preferred the core-calibrated well logs to interpret the bypassed pay in the study area, especially focused on the cases of low contrast resistivity reservoir in which there was little resistivity contrast between water bearing formation and oil bearing formation. The core experiment and the well testing data demonstrated that some of the intervals below the high resistivity pay were productive. Combined with the logging parameters, the lower boundary of reservoirs were established while the non-reservoirs were excluded. Considering the impact of the formation water salinity, the pore network, and the contents of clay minerals, we determined the characteristics of logging response of the bypassed pay and quantified the oil saturation to provide additional information on the producibility of the reservoir, especially in transition zone ([Figure 3](#)).

Reserve additions and performance improvements of the turbidite channel reservoirs in the study area mainly depended on two aspects of the work above, including reservoir characterization and bypassed pay evaluation. We expect the production of these reservoirs in the study area to increase over 10% in the next few years by drilling the infill wells and employing the bypassed pay.

### **Selected References**

Mayall, M., and I. Stewart, 2000, The Architecture of Turbidite Slope Channels, *in* P. Weimer, R.M. Slatt, J. Coleman, N.C. Rosen, H. Nelson, A.H. Bouma, M.J. Styzen, and D.T. Lawrence (eds.), *Deep-Water Reservoirs of the World: Gulf Coast Section SEPM, 20th Annual Research Conference*, p. 578-586.

Pu, X.G., L.H. Zhou, W.G. Wang, et al., 2013, Medium-Deep Clastic Reservoirs in the Slope Area of Qikou Sag, Huanghua Depression, Bohai Bay Basin: *Petroleum Exploration and Development*, v. 40/1, p.36-48.

Byrnes, A., and S. Bhattacharya, 2006, Influence of Initial and Residual Oil Saturation and Relative Permeability on Recovery from Transition Zone Reservoirs in Shallow Shelf Carbonates: 2006 SPE/DOE Symposium on Improved Oil Recovery, Tulsa, Oklahoma, USA, 22-26 April 2006, SPE 99736, 11 p.

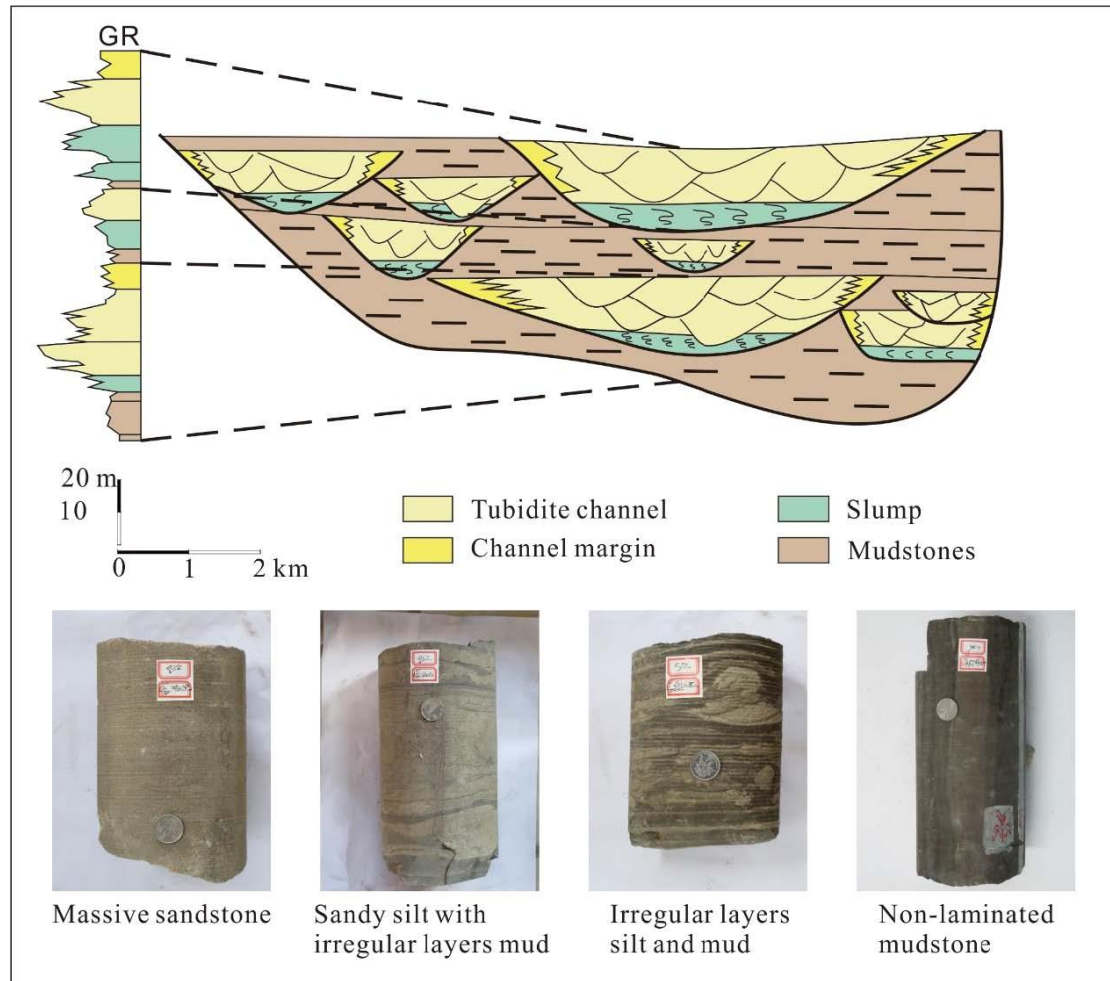


Figure 1. Facies model of turbidite channel showing the potential reservoir distribution and four types of rocks in each facies.

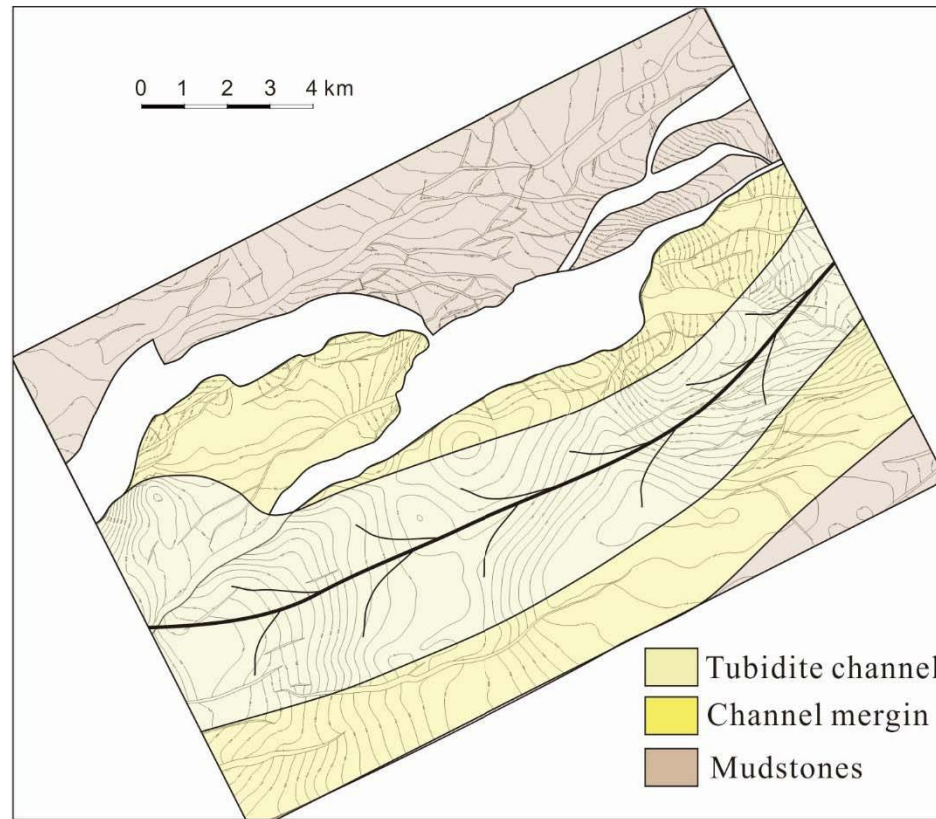


Figure 2. Facies distribution of turbidite reservoir in Beidagang Structural Belt, Bohaiwan Basin.

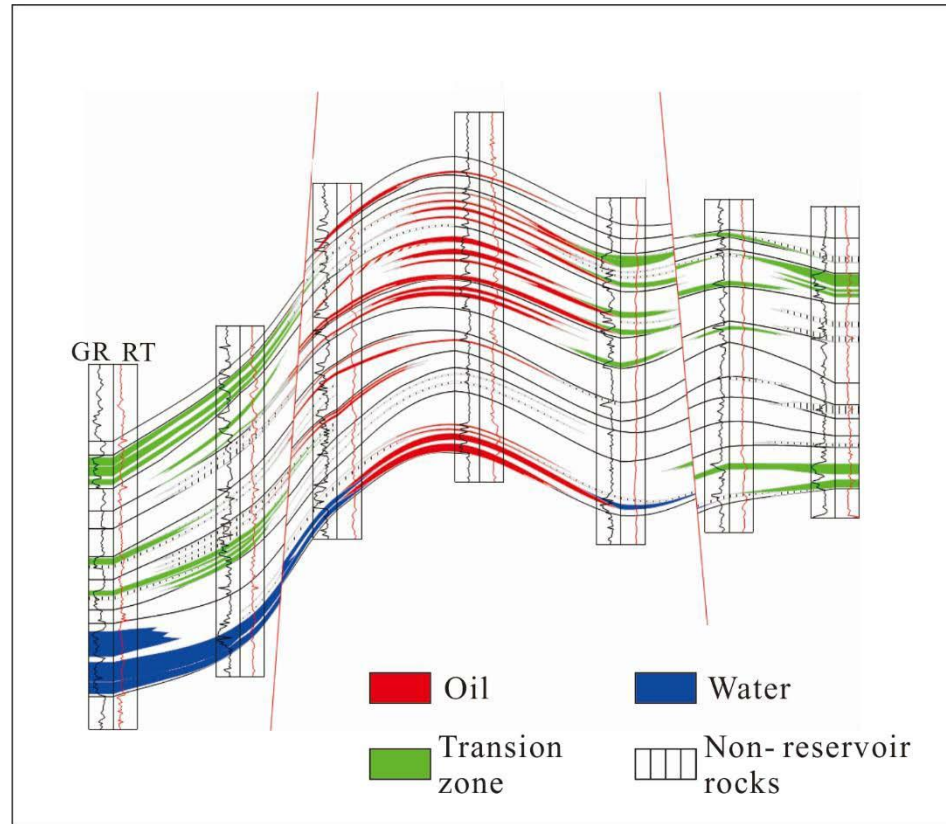


Figure 3. Cross section of pay zone showing the bypassed pay in transition zone.