

Investigation of Pore Structure within the Weyburn Oilfield using Synchrotron Microtomography*

Chad Glemser¹, Tom Kotzer², and Chris Hawkes¹

Search and Discovery Article #20294 (2015)

Posted February 23, 2015

*Adapted from extended abstract prepared in conjunction with a presentation given at CSPG/CSEG 2007 GeoConvention, Calgary, AB, Canada, May 14-17, 2007, CSPG/CSEG/Datapages © 2015

¹University of Saskatchewan, Saskatoon, SK, Canada (ctg682@mail.usask.ca)

²Canadian Light Source Inc., Saskatoon, SK, Canada

Abstract

Synchrotron X-ray Computed Microtomography (CMT) is a powerful imaging technique that utilizes coherent and brilliant synchrotron light to produce high-resolution, three-dimensional images based on differences in X-ray attenuation within a sample. CMT provides a unique and novel approach for extracting physically realistic images of reservoir quality rocks, nondestructively with micron-scale (50 μm -0.1 μm) resolution. Tomographic images of rocks collected at this scale permit identification, visualization and quantification of minerals and pore structure (i.e. volume, shape, connectivity and throat radii) that can be used to obtain and understand petrophysical properties such as permeability, capillary pressure and formation factor (Kayser et al., 2006). CMT analysis can be done on small (cm-mm) sections of core, such as side-wall cores and damaged, fragile and unconsolidated samples, which has implications for using CMT methods to study future conventional and unconventional (i.e. coal bed methane (CBM), tight gas and shale gas) reservoirs (Arns et al., 2005).

Introduction

In this study, CMT analyses have been carried out on Mississippian limestone and dolostone samples obtained from the Weyburn Reservoir, site of EnCana Corporation's CO₂-miscible Enhanced Oil Recovery (EOR) project. Sections of carbonate core collected prior to CO₂ injection have been imaged with synchrotron CMT at a spatial resolution of 7 to 10 μm . Total porosity information obtained from CMT on the carbonate cores show variable pore volume distributions ranging from 10 μm^3 to 4 mm^3 on sample volumes ranging from 213 mm^3 to 306 mm^3 , which correspond, favorably with empirical results from gas permeability measurements ([Figure 1](#)).

Discussion and Conclusions

Mercury porosimetry is being performed on these same carbonate cores to resolve the submicron porosity existing below the CMT image resolution and, for mercury capillary pore volumes $\geq 10\mu\text{m}$, to provide a direct comparison with pore volumes extracted from CMT data. Calculation of theoretical permeabilities will be attempted using the Kozeny-Carmen and Katz-Thompson relationships with porosity information obtained from both CMT and mercury porosimetry data. These theoretical permeabilities will then be compared with conventional

laboratory based gas and liquid permeability measurements on identical sections of carbonate core to elucidate the validity of these relationships in carbonate lithologies and potential application of CMT as a new formation evaluation tool.

Additionally, the sensitivity of CMT to density related differences within the carbonate cores permits the identification of minerals. Using transmitted light microscopy, electron probe microanalysis (EPMA) and backscattered electron images, compositional information ([Figure 2a](#)) can be obtained and integrated with differences in X-ray attenuation from CMT to delineate the relationship between mineral phase and X-ray attenuation (LAC) ([Figure 2b](#)). From this, minerals having an X-ray attenuation difference of approximately 4.5% can easily be resolved within the CMT data ([Figure 3](#)). However, CMT's dependence on density contrasts within a sample minimizes visualization of different sedimentological and ichnological textures occurring in the same mineral phase ([Figure 2a](#)).

References Cited

- Arns, C.H., F. Bauguet, A. Limaye, A. Sakellariou, T.J. Senden, A.P. Sheppard, R.M. Sok, W.V. Pinczewski, S. Bakke, L.I. Berge, P.E. Øren, and M.A. Knackstedt, 2005, Pore-scale characterization of carbonates using X-ray microtomography: SPE Journal, v. 10, p. 475-484.
- Kayser, A., M. Knackstedt, and M. Ziauddin, 2006, A closer look at pore geometry: Oilfield Review, v. 18, p. 4-13.

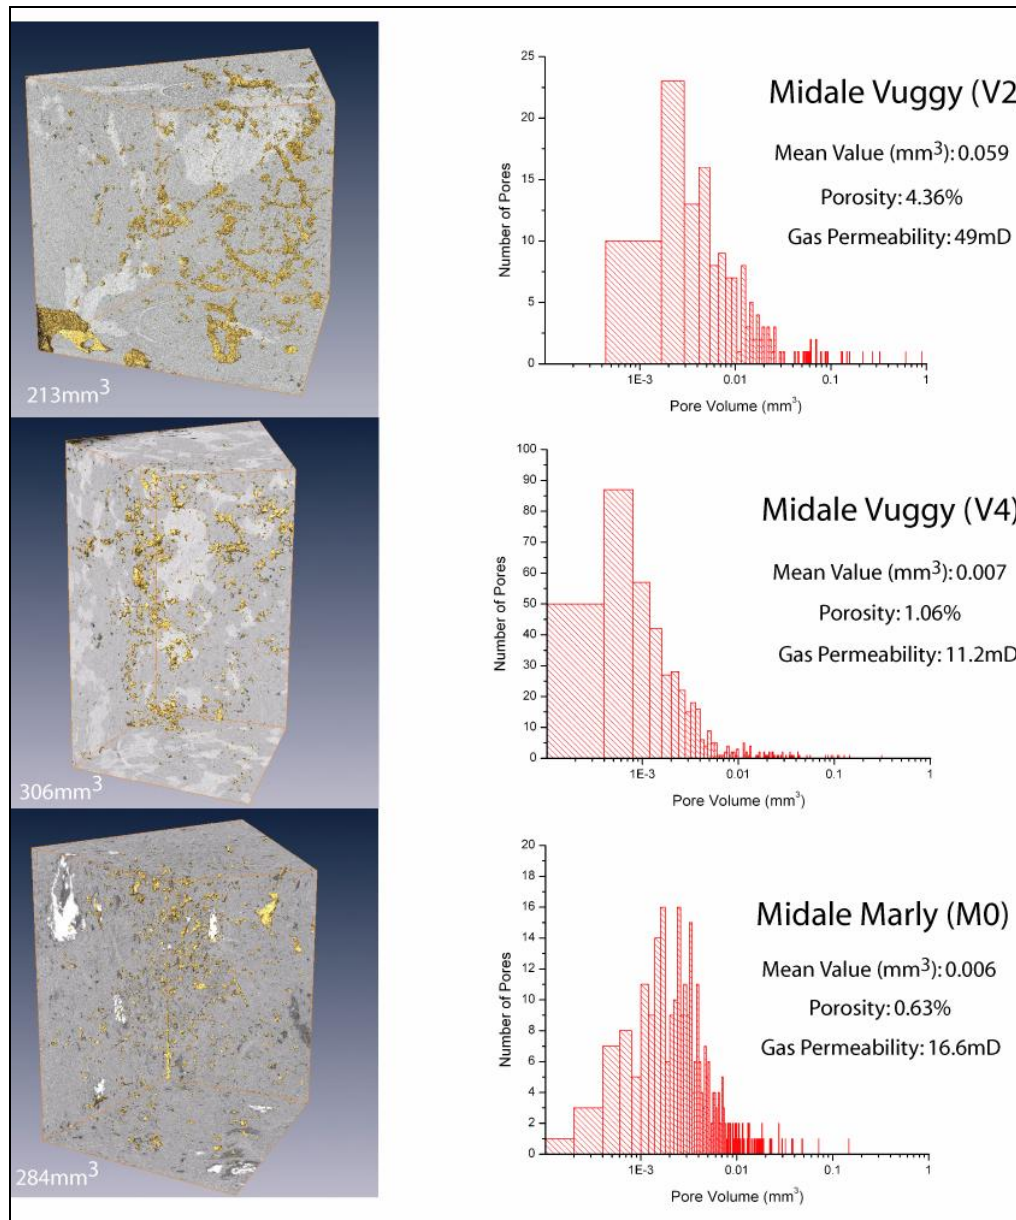


Figure 1. Rendered CMT images of porosity in the Midale Vuggy and Marly units (left) and corresponding CMT pore volume distribution (right). Gas permeability values (Klinkenberg corrected) have been performed conventionally.

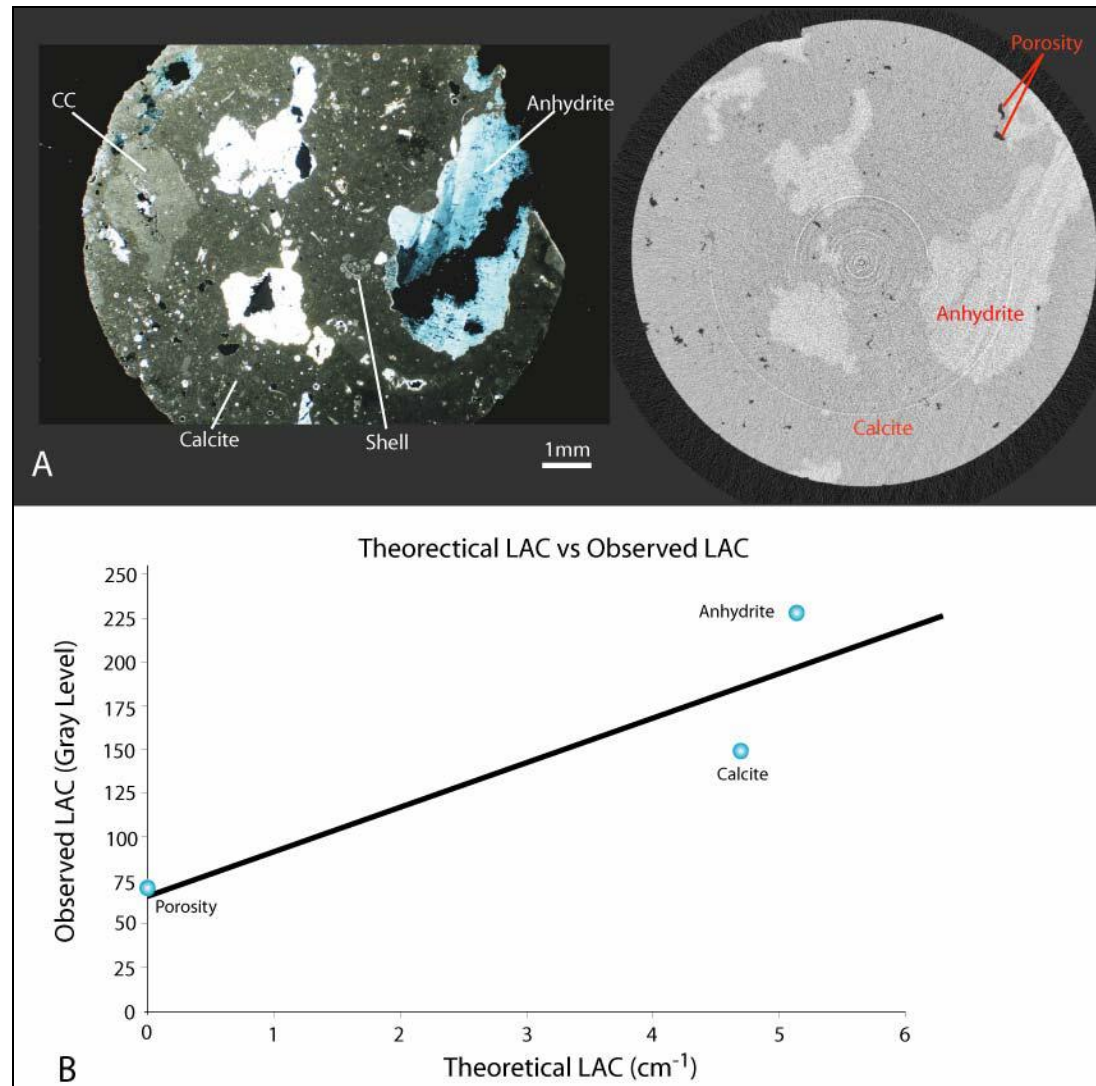


Figure 2. (A) Comparison between a thin-section of the Midale Vuggy observed under cross-polarized light (left) and its corresponding CMT image (right). Note enhanced porosity in the thin-section can be attributed to ‘plucking’ that occurred during the preparation process. Additionally, the coarser calcite (CC) located on the right side of photomicrograph and the endothyrid foraminifera test (shell) located at the center of the photomicrograph do not appear in the CMT image. This can be attributed to both the coarser calcite and endothyrid test being composed of similar density calcite to that of the matrix. (B) Preliminary calibration curve correlating mineralogy from observed gray-level values in a CMT image with calculated theoretical linear attenuation coefficients (LAC).

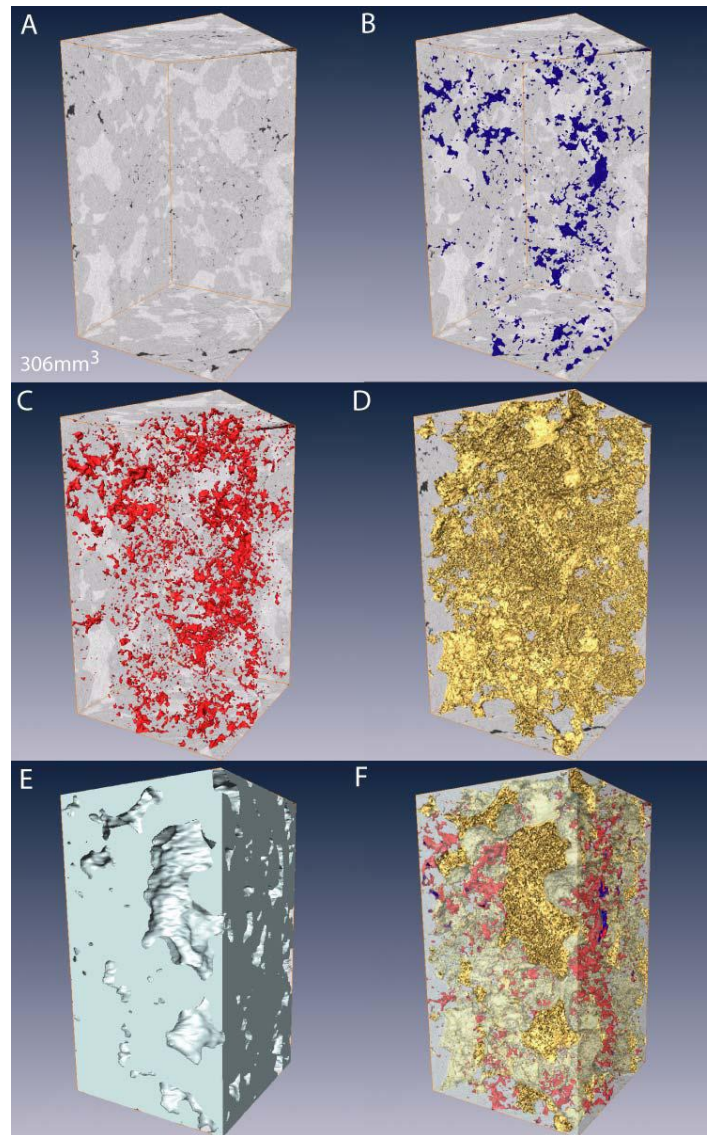


Figure 3. Sequence of CMT images of the Midale Vuggy (V4) segmented according to the present mineral phases verified by EPMA. Image A shows the total sample volume (306mm³), light gray and gray regions are the rock volume and black areas are porosity. Image B displays the 3-D distribution of porosity (blue). Red surfaces in image C depict the 3-D distribution of dolomite. Image D displays the 3-D extent of the light gray (highest density) mineral phase, anhydrite (gold). In image E, the metallic silver represents calcite, which is gray in the CMT slices. Image F shows all mineral phases (calcite is transparent gray) and porosity plotted together.