

# **Downhole Geochemical Analysis of Gas Content and Critical Desorption Pressure for Carbonaceous Reservoirs\***

**John Pope<sup>1</sup>, Daniel Buttry<sup>1</sup>, Robert Lamarre<sup>1</sup>, Bret Noecker<sup>1</sup>, Steven MacDonald<sup>1</sup>, Brian LaReau<sup>1</sup>, Patrick Malone<sup>1</sup>, Neil Van Lieu<sup>1</sup>, Daniel Petroski<sup>1</sup>, Matthew Accurso<sup>1</sup>, David Harak<sup>1</sup>, Richard Kutz<sup>1</sup>, Stephen Luker<sup>1</sup>, and Raymond Martin<sup>1</sup>**

Search and Discovery Article #41600 (2015)

Posted March 30, 2015

\*Adapted from extended abstract prepared in conjunction with a presentation given at CSPG/CSEG 2006 GeoConvention, Calgary, AB, Canada, May 15-18, 2006, CSPG/CSEG/Datapages © 2015

<sup>1</sup>WellDog Inc., Laramie, Wyoming, United States ([jpoppe@welldog.com](mailto:jpoppe@welldog.com))

## **Abstract**

This paper describes research directed at developing a new method to determine critical desorption pressure and gas content. This method is facilitated by development of a Ramanspectroscopy based sensor capable of detecting and quantifying trace amounts of solution gas. In this report, we describe the reservoir physics that makes the method possible, we share laboratory results that illustrate and confirm the underlying physics, and we show some representative field surveys.

## **Introduction**

Until recently, determining critical desorption pressure and gas content for coal seams was difficult, time-consuming and expensive. Generally accepted industry practice has been to retrieve a core sample of the coal, desorb the gas that the coal contains, and relate the resultant gas content to critical desorption pressure, and thus partial pressure, via an adsorption isotherm. This typical analysis is illustrated in [Figure 1](#).

This method involves a number of technical challenges and inherent uncertainties, including high expense and risk for core retrieval, difficulties in controlling or measuring “lost gas”, a high sensitivity of petrophysical properties to reservoir conditions (e.g. temperature and moisture content), and the weeks to months required to obtain accurate desorption data. Because of these challenges and uncertainties, many coalbed operators do not pursue detailed reservoir analysis of any kind – but instead rely on anecdotal information and “post-mortem” production analysis to develop a rudimentary picture of the coalbed reservoir.

This paper describes research directed at developing a new method to determine critical desorption pressure and gas content. In this report we describe (in the Background section below) the reservoir physics that makes this method possible, we share laboratory results that illustrate and confirm that physics, and we show some representative field surveys. Future publications will report in more detail the accuracy of this method, case studies illustrating its practical use, and the results of in-depth laboratory and field petrophysical and reservoir studies using this

technology. The result of this research has been a practical method for analyzing a coalbed reservoir quickly and accurately. This method has been used to describe more than 120 coalbed reservoirs in basins around North America.

## Background

Natural gas reservoirs are primarily comprised of a storage rock, water and methane (Law and Rice, 1994). The amount of methane contained (adsorbed and/or absorbed) in the rock can be represented by an effective partial pressure of methane in the reservoir system (Nuccio, 1997). This partial pressure then provides a ready quantity from which to describe allocation of methane throughout the reservoir. For example, the methane gas content of a coal seam is related to the partial pressure of methane via an adsorption isotherm (Figure 2). Likewise, the solution gas level in a coal seam (i.e. the amount of methane dissolved in the coal seam water) is related to the partial pressure of methane via a solubility law such as Henry's Law (Fogg and Gerrard, 1991) (Figure 3).

The common x axes for the graphs in Figure 2 and Figure 3 provide a connection between the solution gas methane concentration and the coal gas content. As a result, determining the effective partial pressure of methane in a reservoir via a solution gas measurement can provide a convenient and accurate route to determining key reservoir properties like gas content. In a coal reservoir, this partial pressure is equivalent to the critical desorption pressure – i.e. the pressure at which the methane partial pressure is equal to the total reservoir pressure (Barker et al., 2003 ). In fact, because the methane distribution throughout a coalbed reservoir is in general at thermodynamic equilibrium (before it is produced), determination of partial pressure at one point results in determination of partial pressure, and the related reservoir characteristics, throughout the reservoir. As an example of the facility of this technique, by determining the concentration of methane in the water and using a solubility law to calculate a partial pressure it is then possible to use that partial pressure, along with an adsorption isotherm, to calculate the gas content of the coal seam itself (Figure 4).

It is possible, given modern bottom hole sampling techniques, to retrieve a sample of fluid from a coalbed reservoir and analyze methane concentration (or partial pressure directly) in a laboratory. However, drilling and completion fluids can create complicated downhole environments that require analysis at multiple points in order to be accurately described. As a result, this research has focused on developing and utilizing a downhole sensor to measure solution gas levels directly. However, few methods are available to determine concentration of methane in water (i.e. solution gas level) in coalbeds. In fact, only one sensor, based on Raman spectroscopy (McCreery, 2000) and developed as part of this research, is capable of measuring solution gas levels in situ.

## Results and Discussion

### Laboratory

Figure 5 shows Raman signals typical for methane gas and for methane dissolved in water. As has been reported in the literature (Sloan et al., 1998), the C-H stretching mode for (a) gas phase methane is found at 2917 cm<sup>-1</sup> while that for (b) methane dissolved in water is observed at 2912 cm<sup>-1</sup>. Figure 6 shows the relationship between instrument response and methane concentration for WellDog's Raman spectrometer. Instrument response was determined by integrating the peak shown in Figure 6 for samples with increasing concentrations. In order to convert

concentration into partial pressure, we employ Henry's Law (Fogg and Gerrard, 1991) and adjust the solubility constant for reservoir temperature, pressure and ionic strength (i.e. salt content). Using this instrument, then, it is possible to analyze trace amounts (< 50 mM) of solution gas and thereby calculate an accurate partial pressure of methane.

We have carried out these analyses on dozens of simulated coal seams. Coal seams were simulated by inserting a cleaved sample of coal (approximately 1 cm<sup>3</sup> in volume) into a specially prepared pressure cell that was equipped with a high-pressure sapphire window, pressurizing the sample cell with methane gas, and then pressurizing the sample cell with water using a water piston assembly. Typically, the systems are allowed to reach equilibrium before analysis. For some cases, in order to effect dewatering of a simulated coal seam, the hydrostatic pressure was gradually reduced while the partial pressure of methane was continuously monitored. Figure 7 shows the results of such an experiment for a sub-bituminous coal pressurized with about 132.6 psi of methane gas and 2,210 psi of water.

The partial pressure of methane in the system (again, calculated via measurement of the solution gas concentration and conversion using Henry's Law) after dissolution was 762 psi. That pressure remained effectively constant while the hydrostatic head was reduced, until the hydrostatic head was equivalent to 762 psi. Further reductions in water pressure caused a reduction in methane partial pressure, and substantial production of gas from the system was observed.

In order to verify that the production of gas originated from the coal, and was not merely cavitation of gas from solution, we collected video of the coal/water interface during similar dewatering experiments. Figure 8 shows a representative photomicrograph of that interface under conditions where the total pressure was greater than the partial pressure (region A in Figure 7). At the critical desorption pressure, and for subsequent lower pressures, we observed clear production of gas from the coal sample. A representative photomicrograph of the system under those conditions (region B in Figure 7) is shown in Figure 9.

Because the initial partial pressure of methane in that reservoir was accurately measured, it is possible to calculate the initial gas content of the coal sample. Using an adsorption isotherm (Figure 10) in which we have used a Langmuir pressure of 750 psi and a Langmuir volume of 260 scf/ton, we can correlate partial pressure of methane to gas content directly, without the need to collect or desorb gas from the actual coal sample. In this simulated coal seam, then, we calculate a gas content of 127 scf/ton.

### Field

In order to perform similar measurements downhole, our group has spent the past five years adapting a laboratory Raman spectrometer to fit into a wireline tool format. The result is a spectrometer that is encased in a housing capable of withstanding 3,250 psi of pressure and that operates readily over standard four-conductor wireline. We have used successive generations of our downhole Raman instrument to analyze more than 120 coalbed reservoirs in the Powder River, Cherokee, and Green River basins of North America.

In order to perform those analyses, we have worked with dozens of coalbed operators. A typical analysis involves review of a well's drilling and completion history and identification of conditions that may interfere with an accurate measurement. Because the measurement is based on analysis of reservoir fluid, situations that compromise that fluid integrity may cause spurious or skewed results. Those situations can include

contribution of fluid from other formations (i.e. commingling), residual drilling or completion fluids, suspended particles, or merely skin damage that has impeded reasonable reservoir fluid flow into the wellbore. Our group has developed a number of internal data processing methods that readily correct for low quality fluids (e.g. caused by suspended fines). In addition, nearly all situations where the wellbore does not contain valid reservoir fluid can be avoided or remedied by careful completion of the well.

Fortunately, these types of fluid issues can be easily diagnosed by simply logging solution gas as a function of depth in a well. For example, [Figure 11](#) shows solution gas logs for a well that contained city water (i.e. it was perforated and not stimulated, and showed little or no water production presumably due to skin damage) and for a well that had been stimulated and was capable of flowing substantial water. While the log in [Figure 11a](#) shows essentially no solution gas in the water column, the log in [Figure 11b](#) shows a log profile that is typical for a wellbore that contains homogeneous reservoir fluid down to the perforated zone at 1950 feet. Below that depth, the solution gas level reflects the fresh water that was resident in the “rathole”.

In the log in [Figure 11b](#), solution gas concentration is constant above the perforated interval up the wellbore until the hydrostatic pressure decreases past the bubble point (above ca. 900 feet). Above that point, the solution gas concentration decreases with the methane solubility limit. Thus, a valid analysis of this well would be to use the reservoir concentrations measured below 900 feet, combined with the temperature, pressure and ionic strength measured at the completion interval, to calculate (via a solubility law) a partial pressure of 230 psi. This value is equivalent to the critical desorption pressure. In addition, using adsorption isotherm values measured for samples of this coal seam in this region of the field, we have calculated a gas content for this coalbed reservoir of 31 scf/ton. (Note that this gas content does not rely on lost gas analysis.)

Variability in coalbed fields is well known, but perhaps underestimated. Our field survey results do not show homogeneous desorption pressure or gas content values for more than a few wells. A typical field study is shown in [Figure 12](#). In this case, seven wells were tested in one seam across a portion of a development. We observed, across a distance of about two miles, variation of gas content from about 90 scf/ton to ca. 30 scf/ton and back to about 80 scf/ton (from top right, to lower left in [Figure 12](#)). We have observed this variability throughout our data set. [Figure 13](#) shows a graph of gas content for 45 well tests performed in six different coal seams over about two years. (Seam names are not disclosed for client confidentiality reasons.) This high degree of variability calls into question the value of performing only a few gas content tests per township when attempting to identify attractive development targets when assessing the gas resource.

### **Acknowledgements**

We acknowledge the long list of current and prior WellDog employees that have contributed to this work, including Dr. John Herries and Dr. Rick Cox. We also acknowledge useful discussions with John Seidle, Rob Garland and Greg Bell.

## References Cited

- Barker, C.E., T.A. Dallegge, and A.C. Clark, 2003, USGS Coal Desorption Equipment and a Spreadsheet for Analysis of Lost and Total Gas from Canister Desorption Measurements: USGS OFR 02-496, Web Accessed February 18, 2015, <http://pubs.usgs.gov/of/2002/ofr-02-496/OFR-02-496.pdf>.
- Fogg, P. and W. Gerrard, 1991, Solubility of Gases in Liquids: John Wiley & Sons, Inc., New York, 344 p.
- Law, B.E., and D.D. Rice, 1994, Hydrocarbons from Coal: AAPG Studies in Geology No. 38, 400 p.
- McCreery, R.L., 2000, Raman Spectroscopy for Chemical Analysis: Wiley-Interscience, New York, 448 p.
- Nuccio, V., 1997, Coalbed methane—An untapped energy resource and environmental concern: USGS Fact Sheet FS-019-97.
- Sloan, E.D., S. Subramanian, P.N. Matthews, J.P. Lederhos, A.A. Khokhar, 1998. Quantifying hydrate formation and kinetic inhibition: Industrial & Engineering Chemistry Research, v. 37/8, p. 3124-3132.

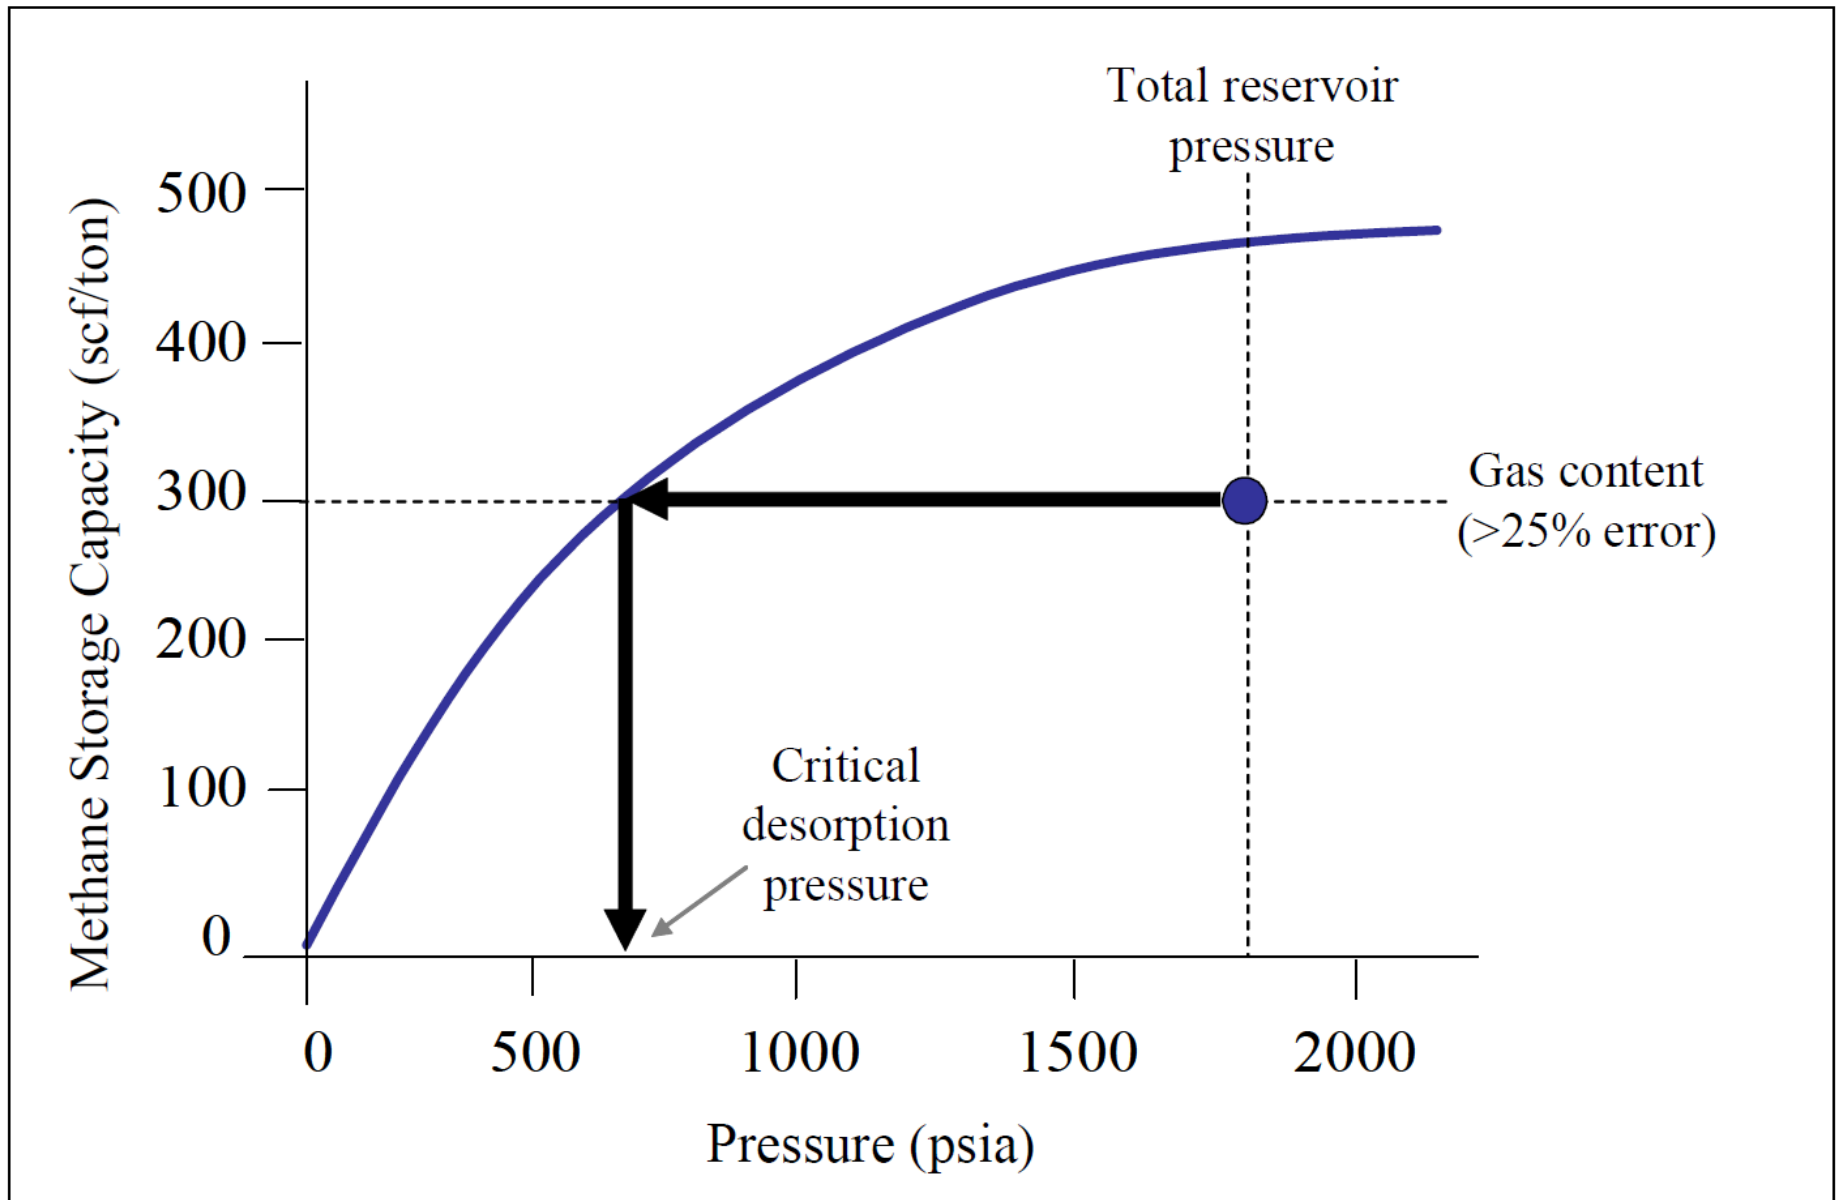


Figure 1. Standard technique for deriving critical desorption pressure from gas content and adsorption isotherm data.

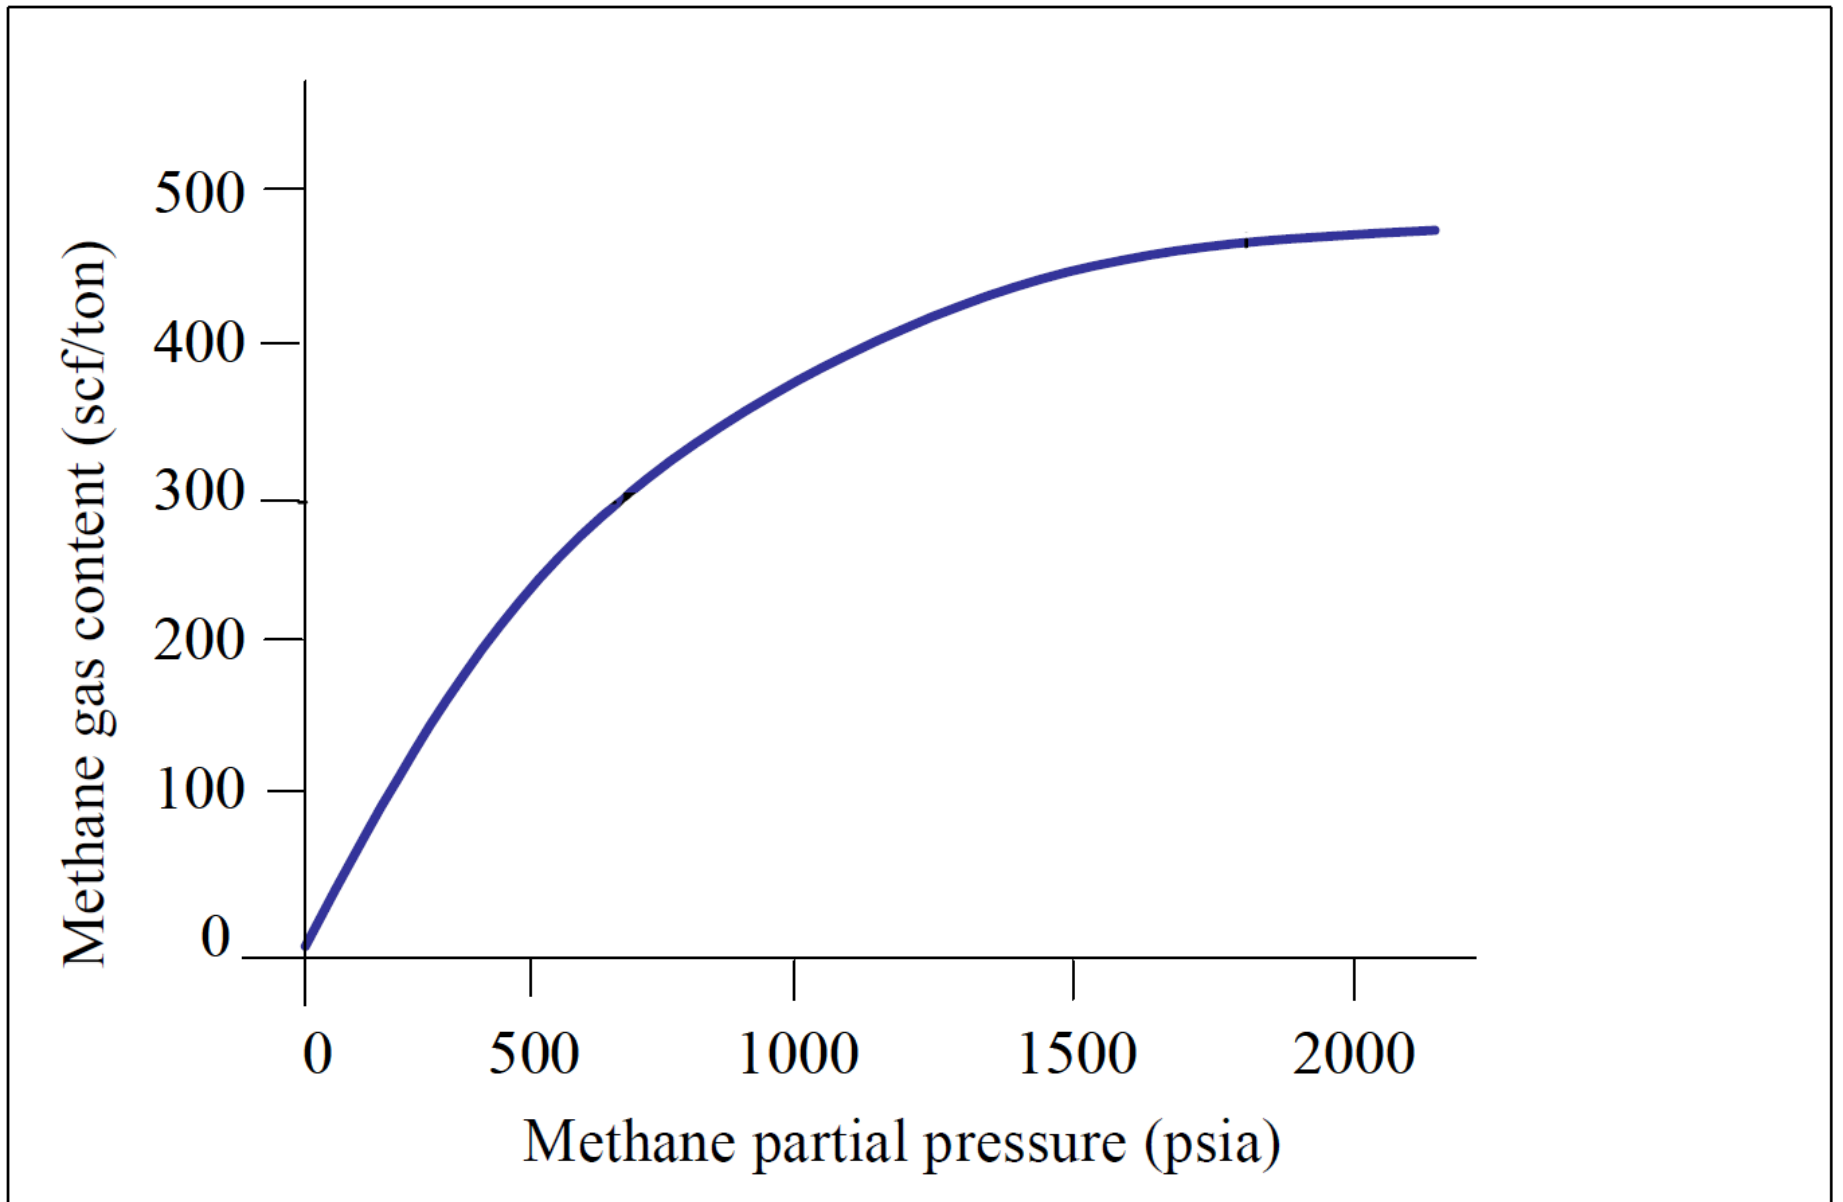


Figure 2. Typical relationship between methane partial pressure and gas content for coal.

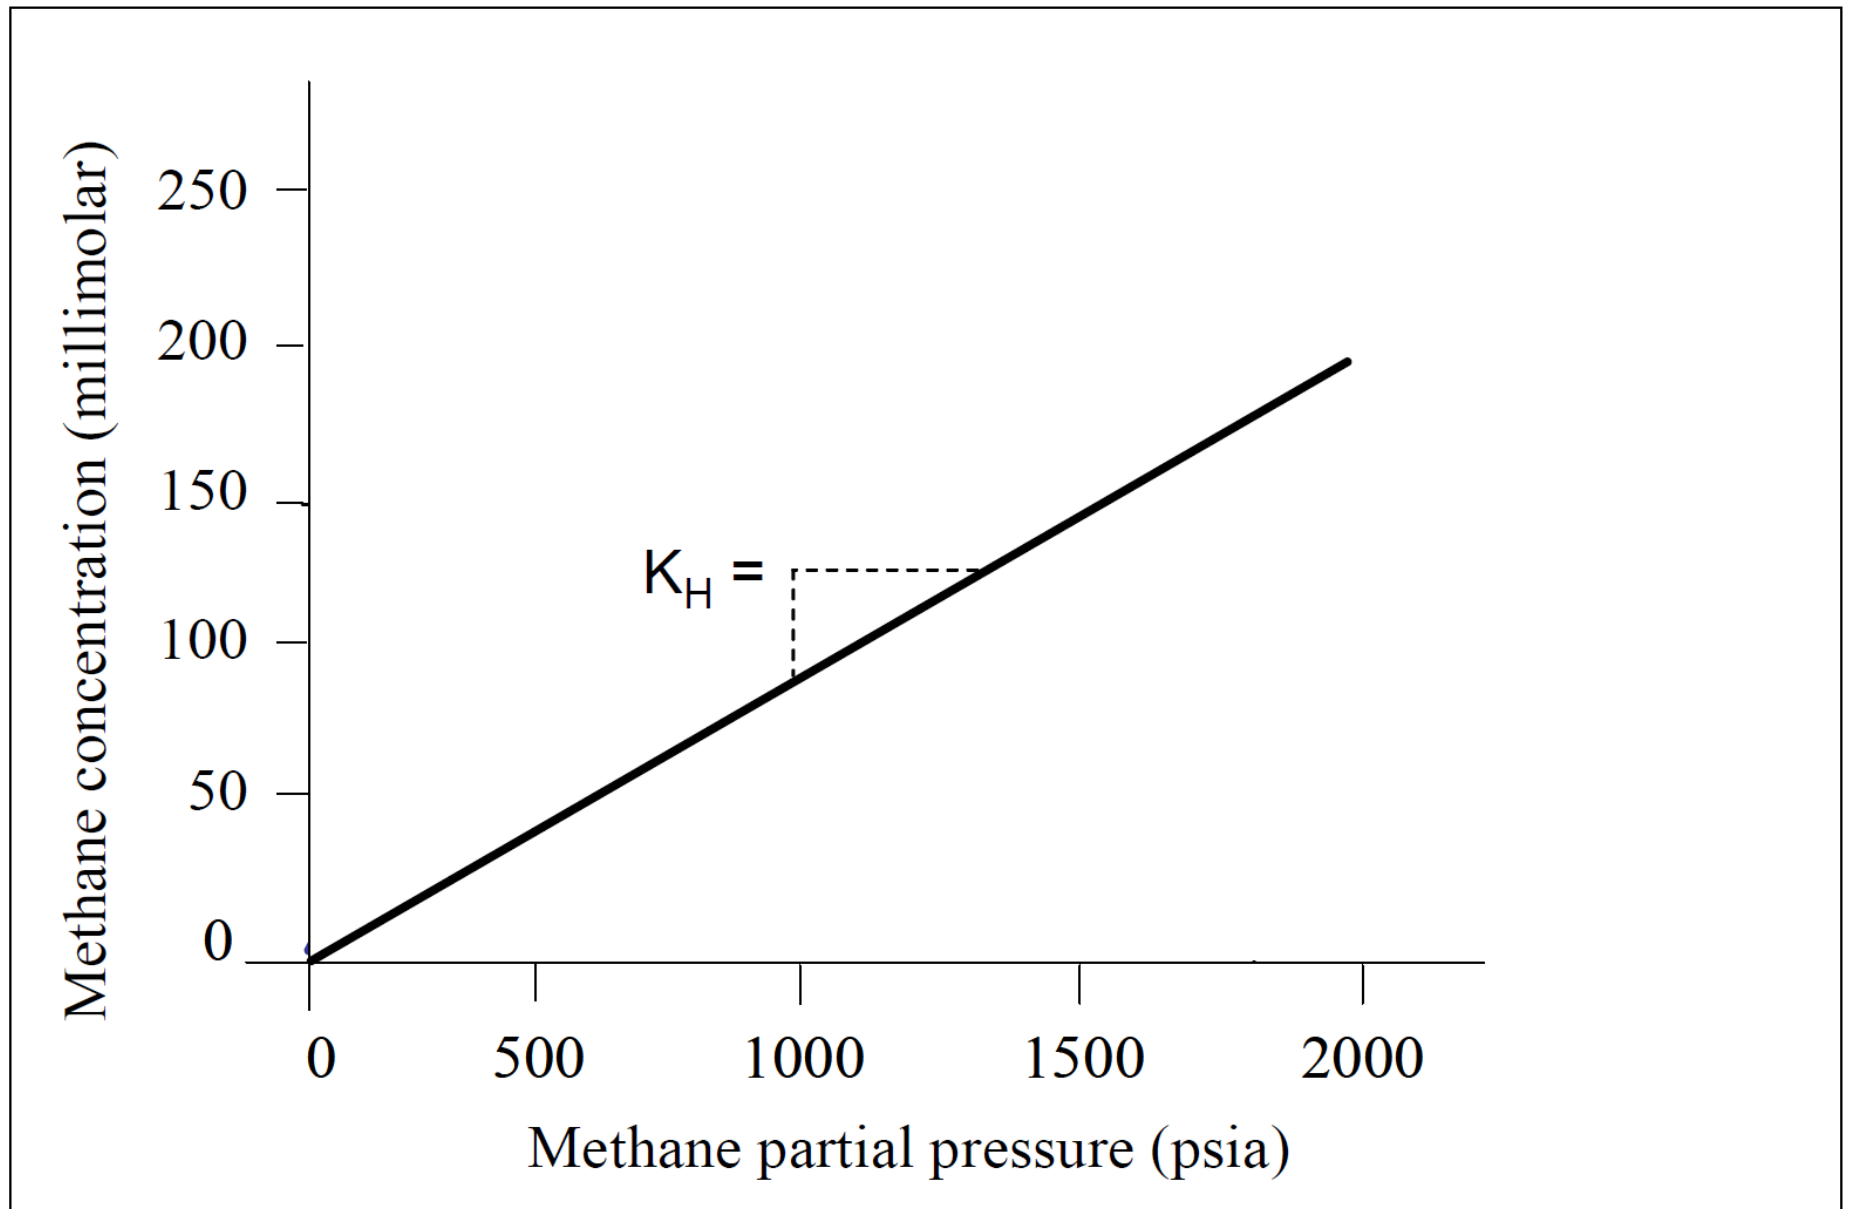


Figure 3. Typical relationship between methane partial pressure and concentration of methane in water under constant environmental conditions. The slope of the line is equivalent to the solubility constant (e.g. Henry's constant,  $K_H$ ). The slope, and thus solubility constant, varies significantly with temperature, and somewhat with pressure and ionic strength (Fogg and Gerrard, 1991)



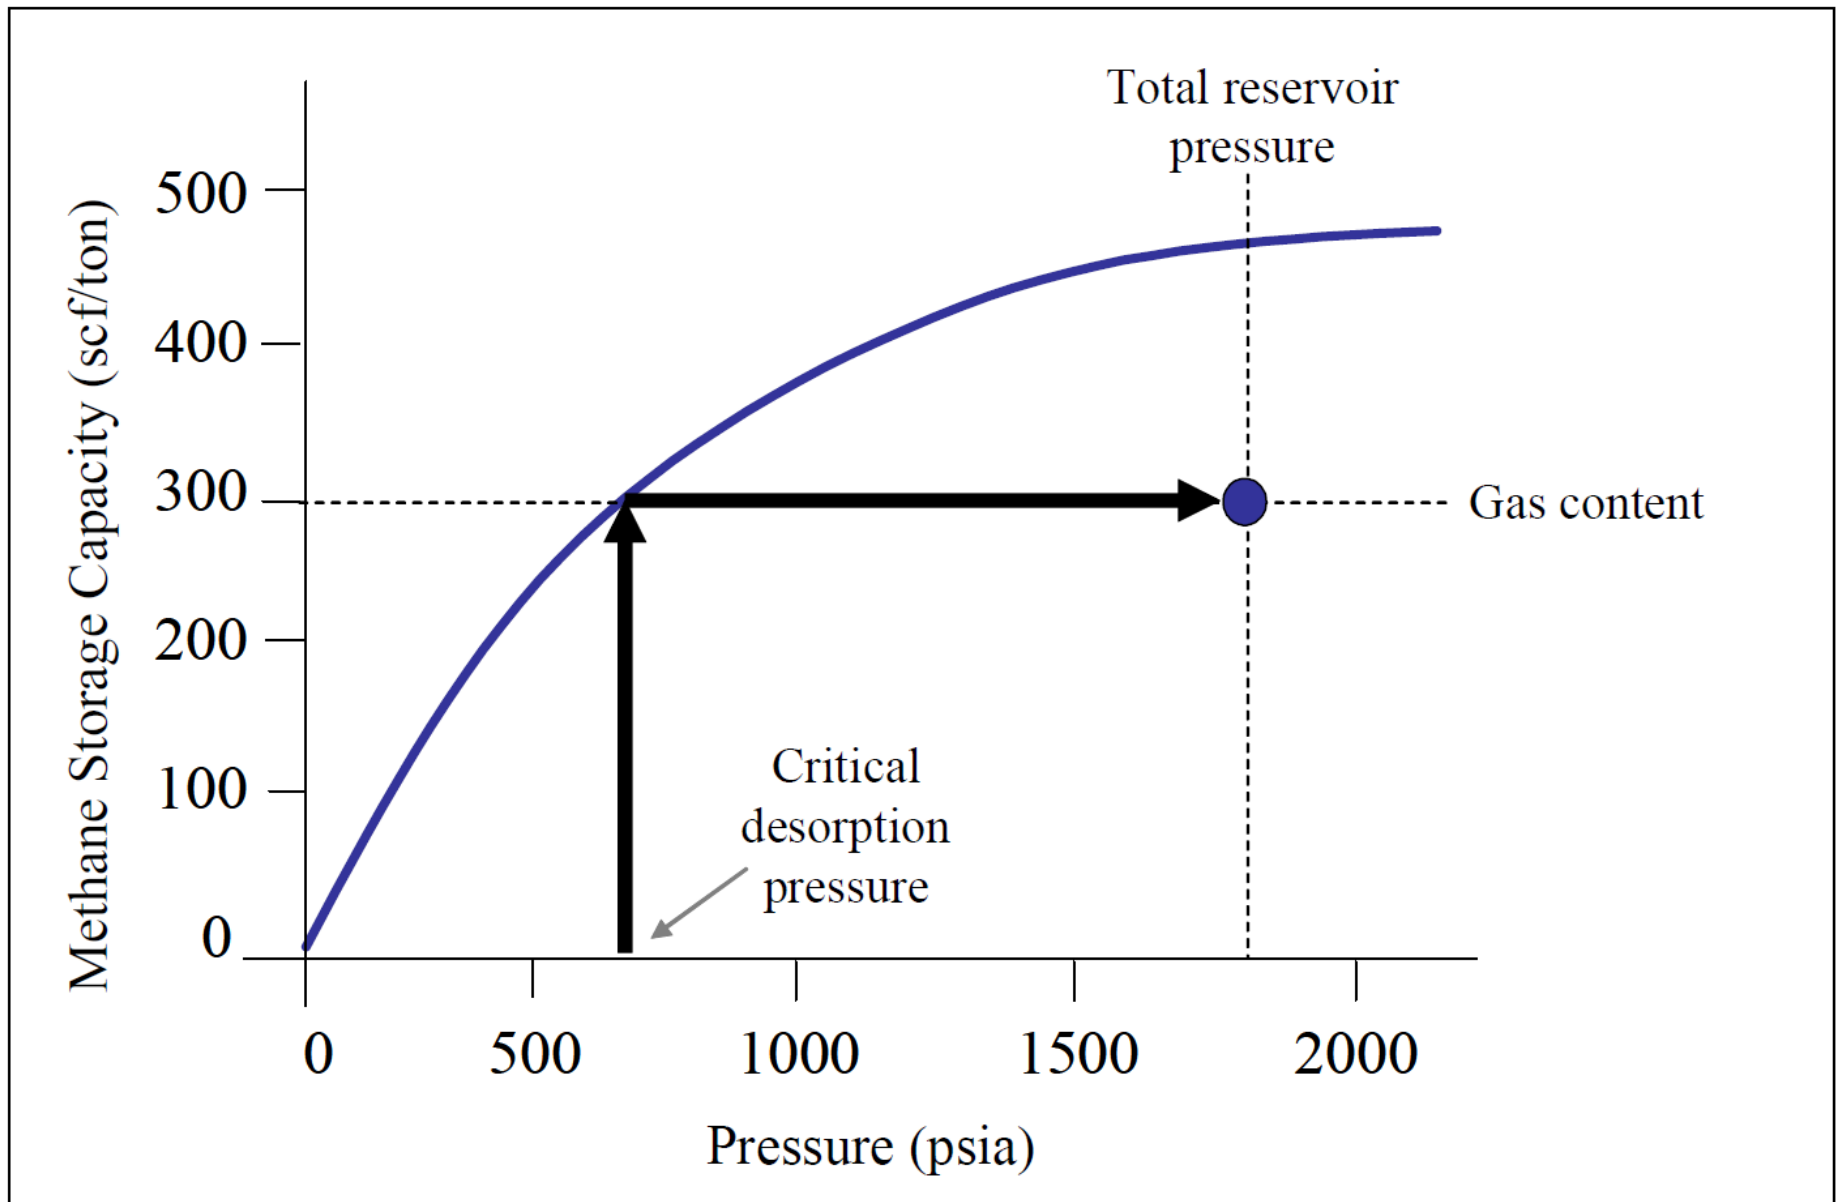


Figure 4. New method for correlating partial pressure, i.e. critical desorption pressure, to gas content using an adsorption isotherm.

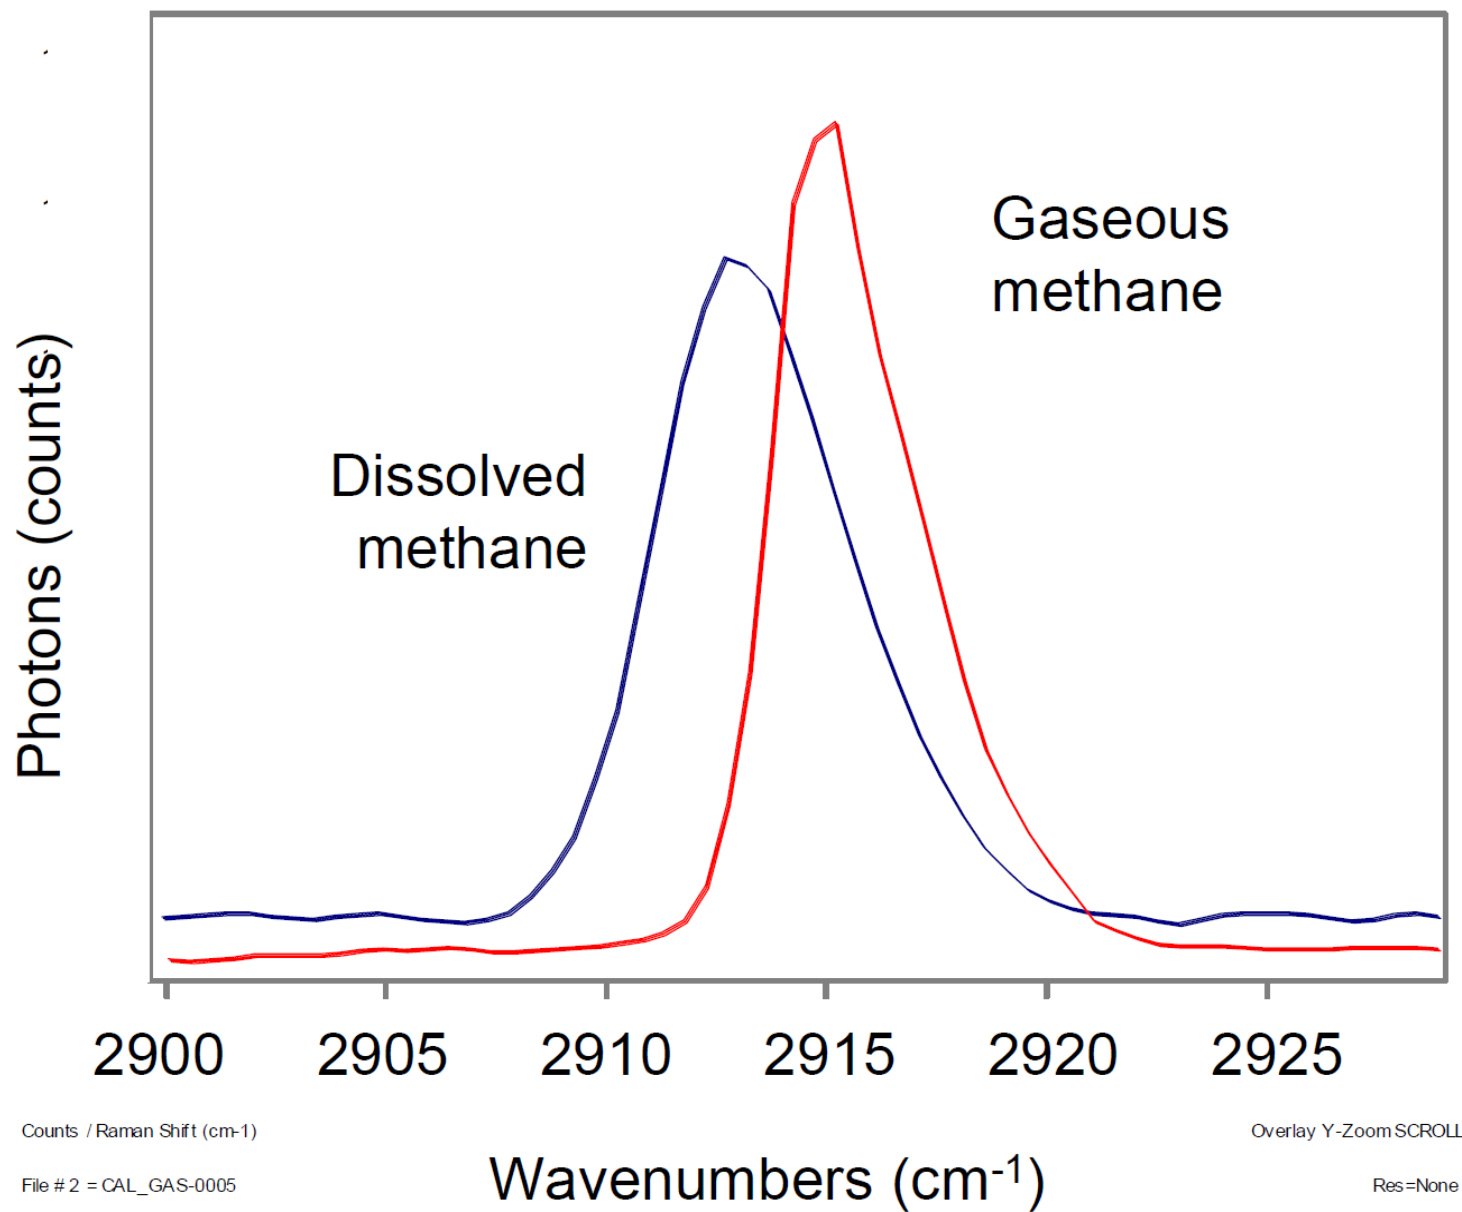


Figure 5. Raman peaks typical of (left) solution gas and (right) production gas. The x-axis is wavenumber, or energy, and the y-axis is photons collected at each energy. Solvation of the methane molecule by water molecules causes a decrease in wavenumber and slight broadening of the peak.

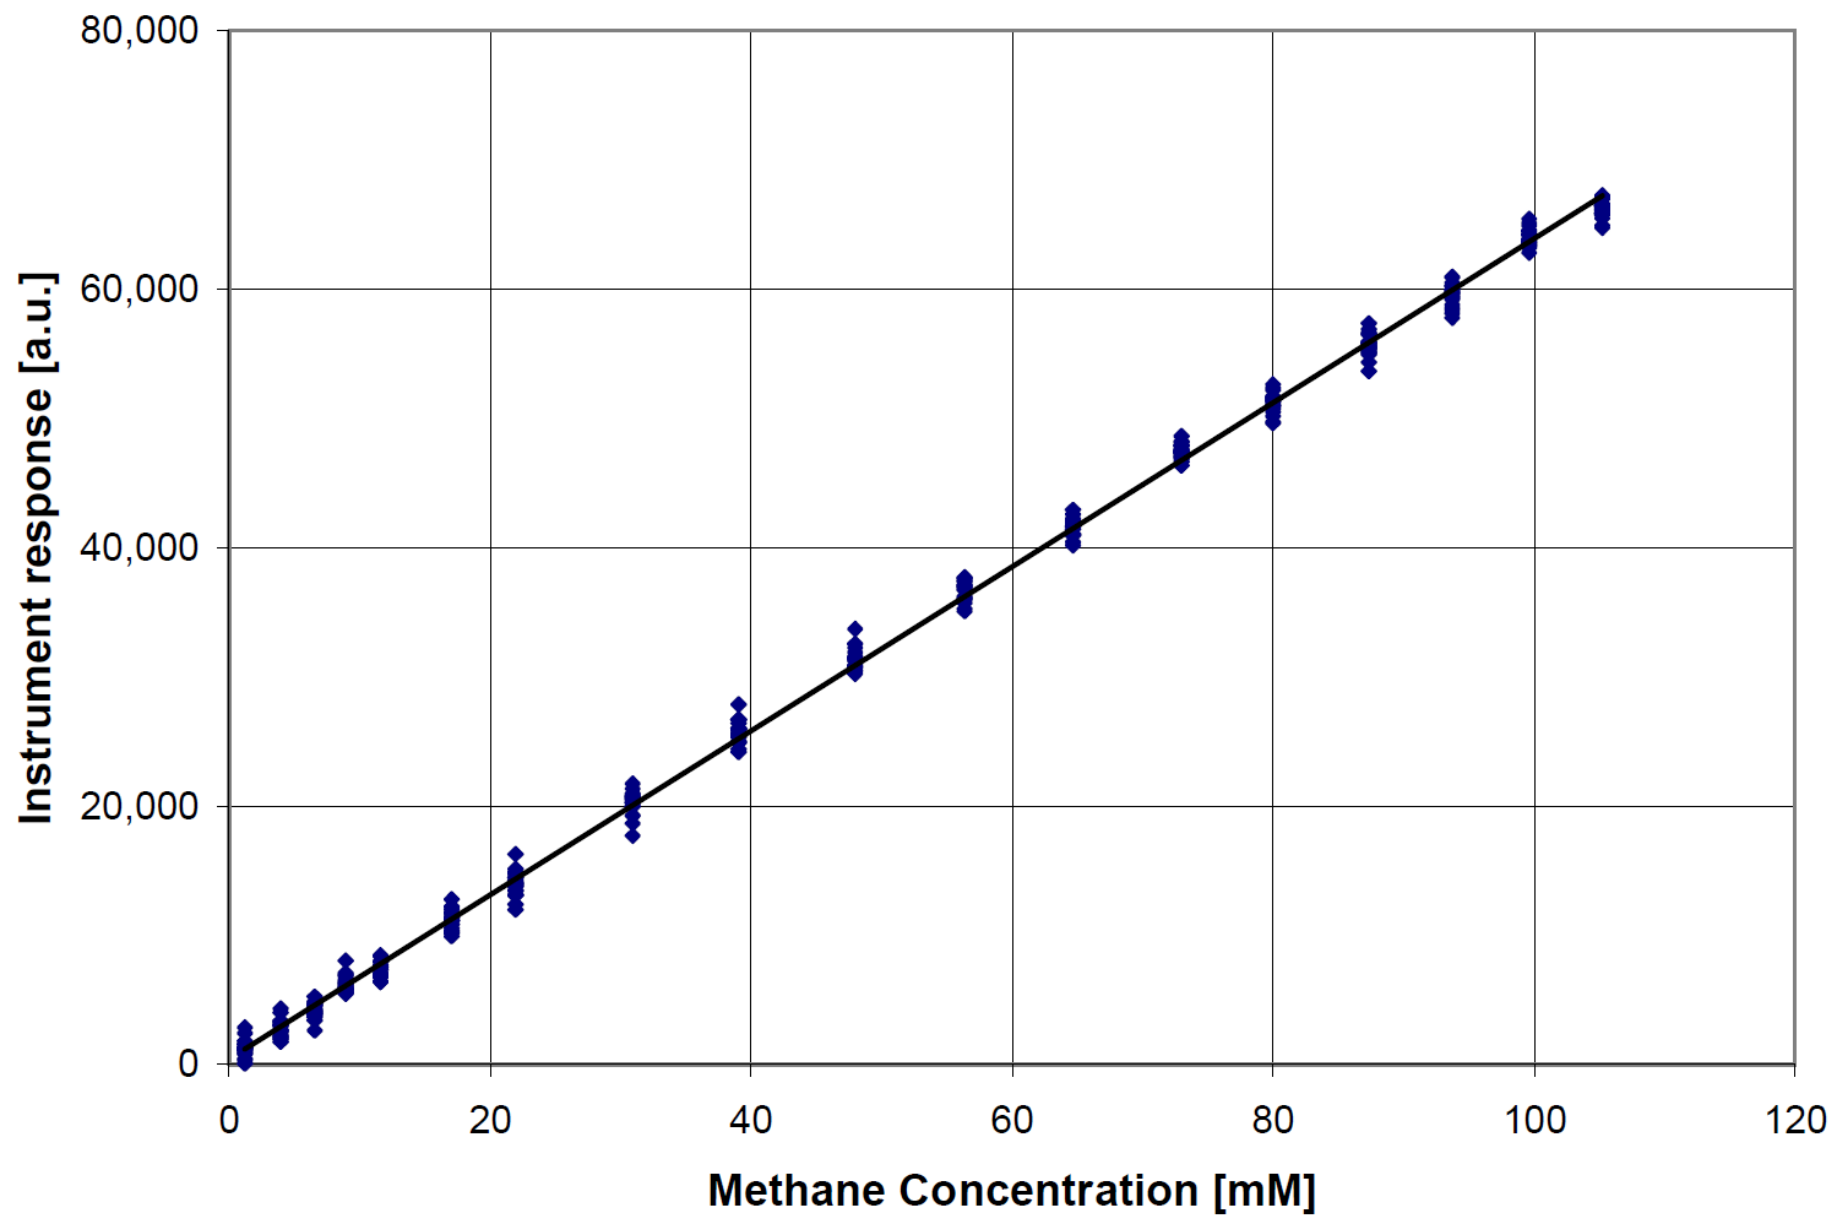


Figure 6. Photons collected at 2912  $\text{cm}^{-1}$  plotted vs. methane concentration for WellDog's Raman spectrometer.

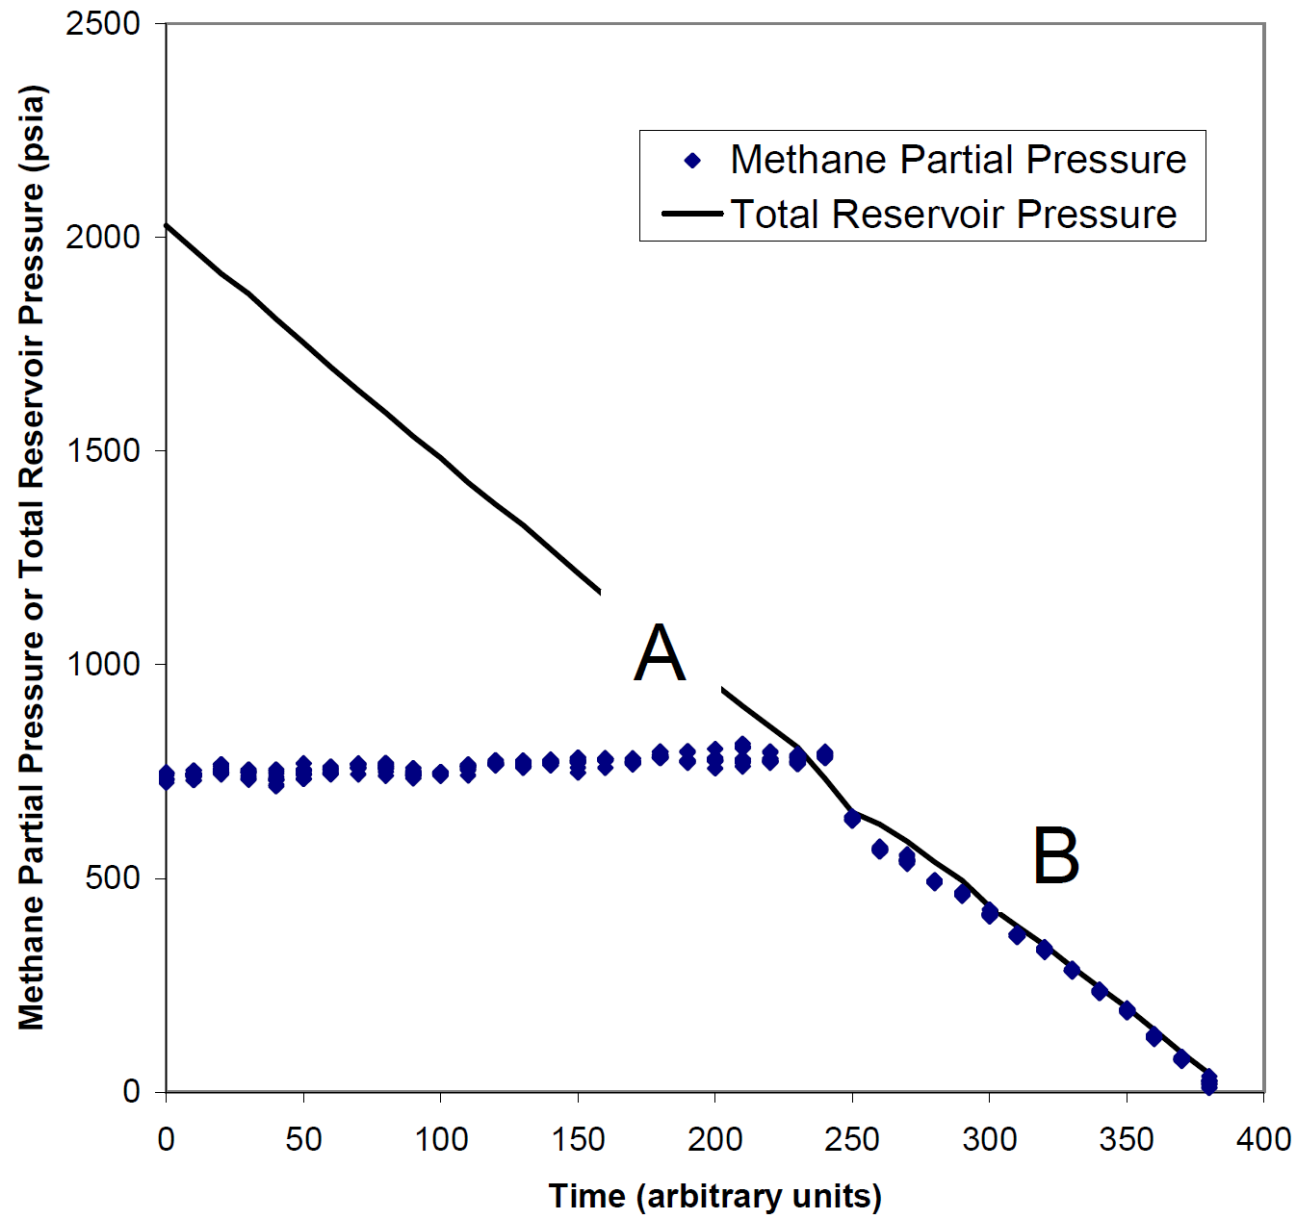


Figure 7. Partial pressure of methane, measured via a Raman spectrometer, and total pressure, measured via a gauge, for a simulated sub-bituminous coalbed methane reservoir during depressurization of that system. “Dewatering time” is a normalized quantity (the experiment was done step-wise in order to insure equilibrium conditions at each point).



Figure 8. Representative photomicrograph of a sub-bituminous coal that is undersaturated (i.e. held in region A in [Figure 7](#)). Image is 7.2 mm wide.



Figure 9. Representative photomicrograph of a sub-bituminous coal that is producing gas (i.e. held in region B in [Figure 7](#)). Image is 7.2 mm wide.

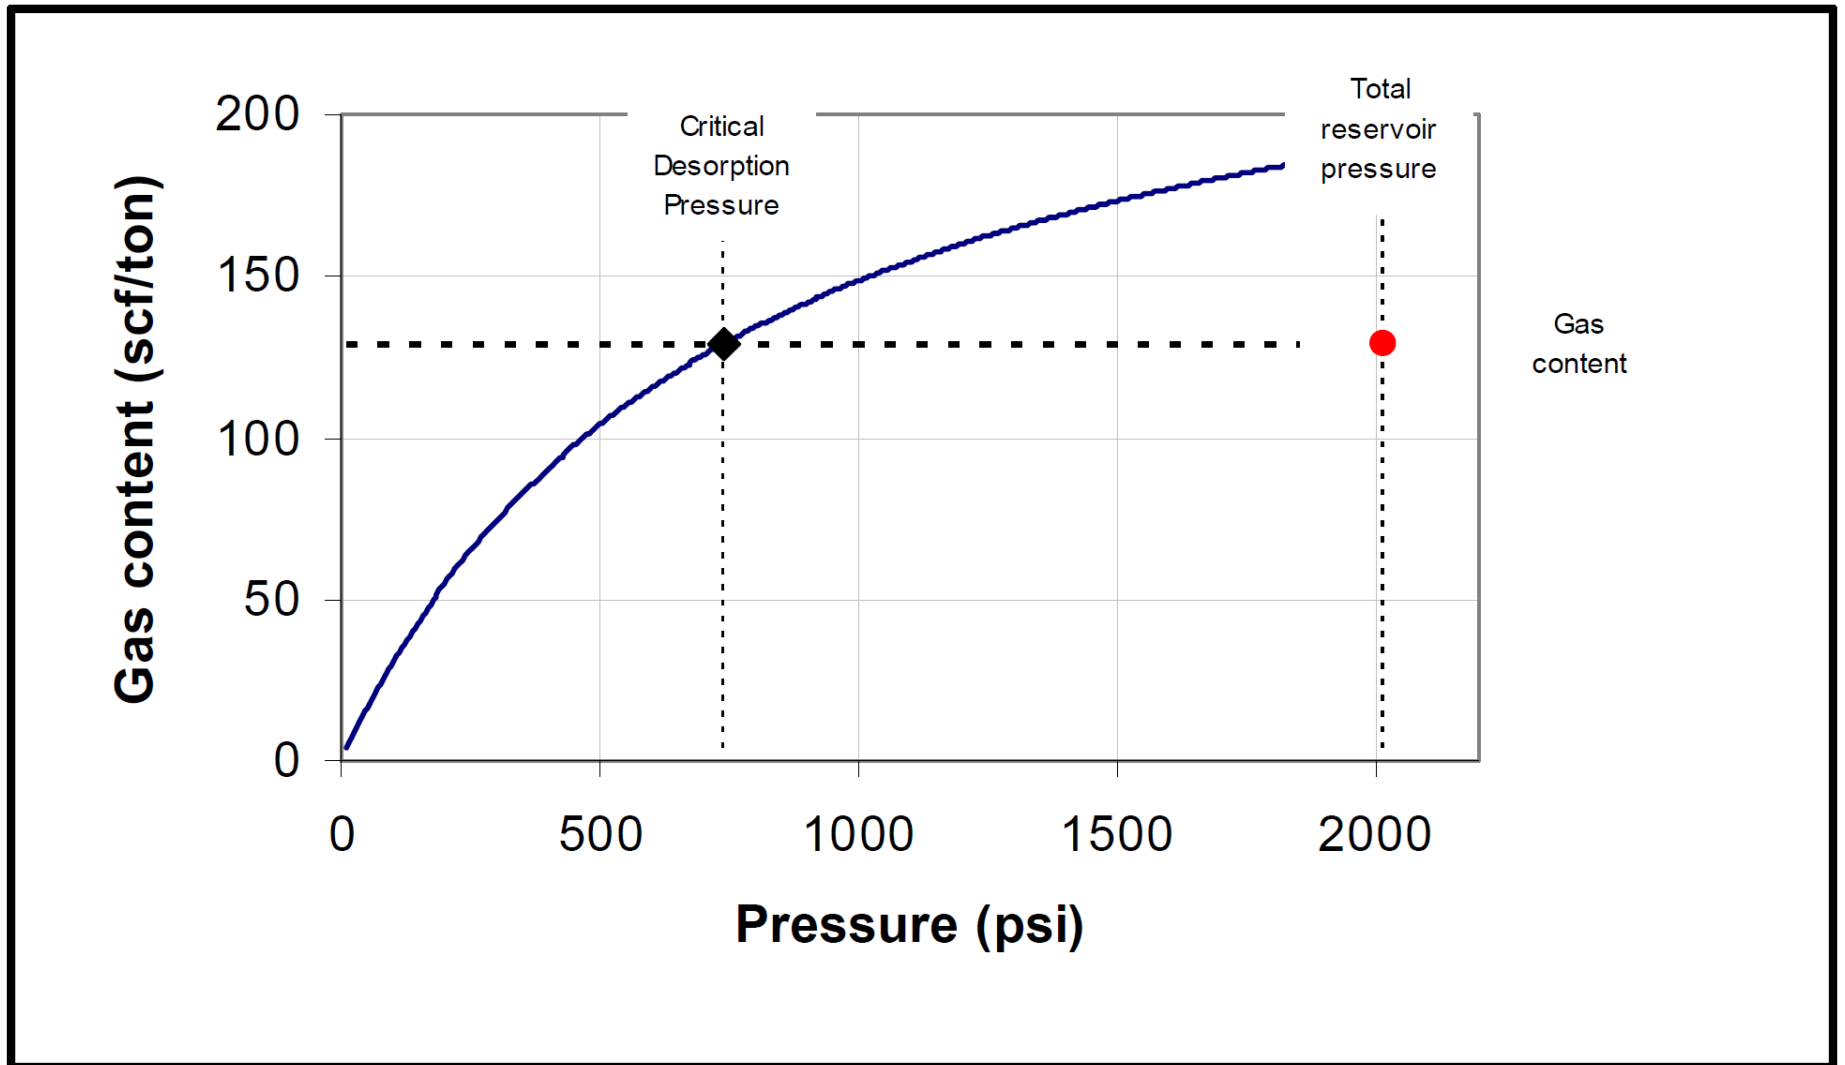


Figure 10. Graphical representation of using a measured partial pressure and an adsorption isotherm to calculate a gas content value for the simulated coal seam described in the text and illustrated in [Figure 7](#), [Figure 8](#), and [Figure 9](#).

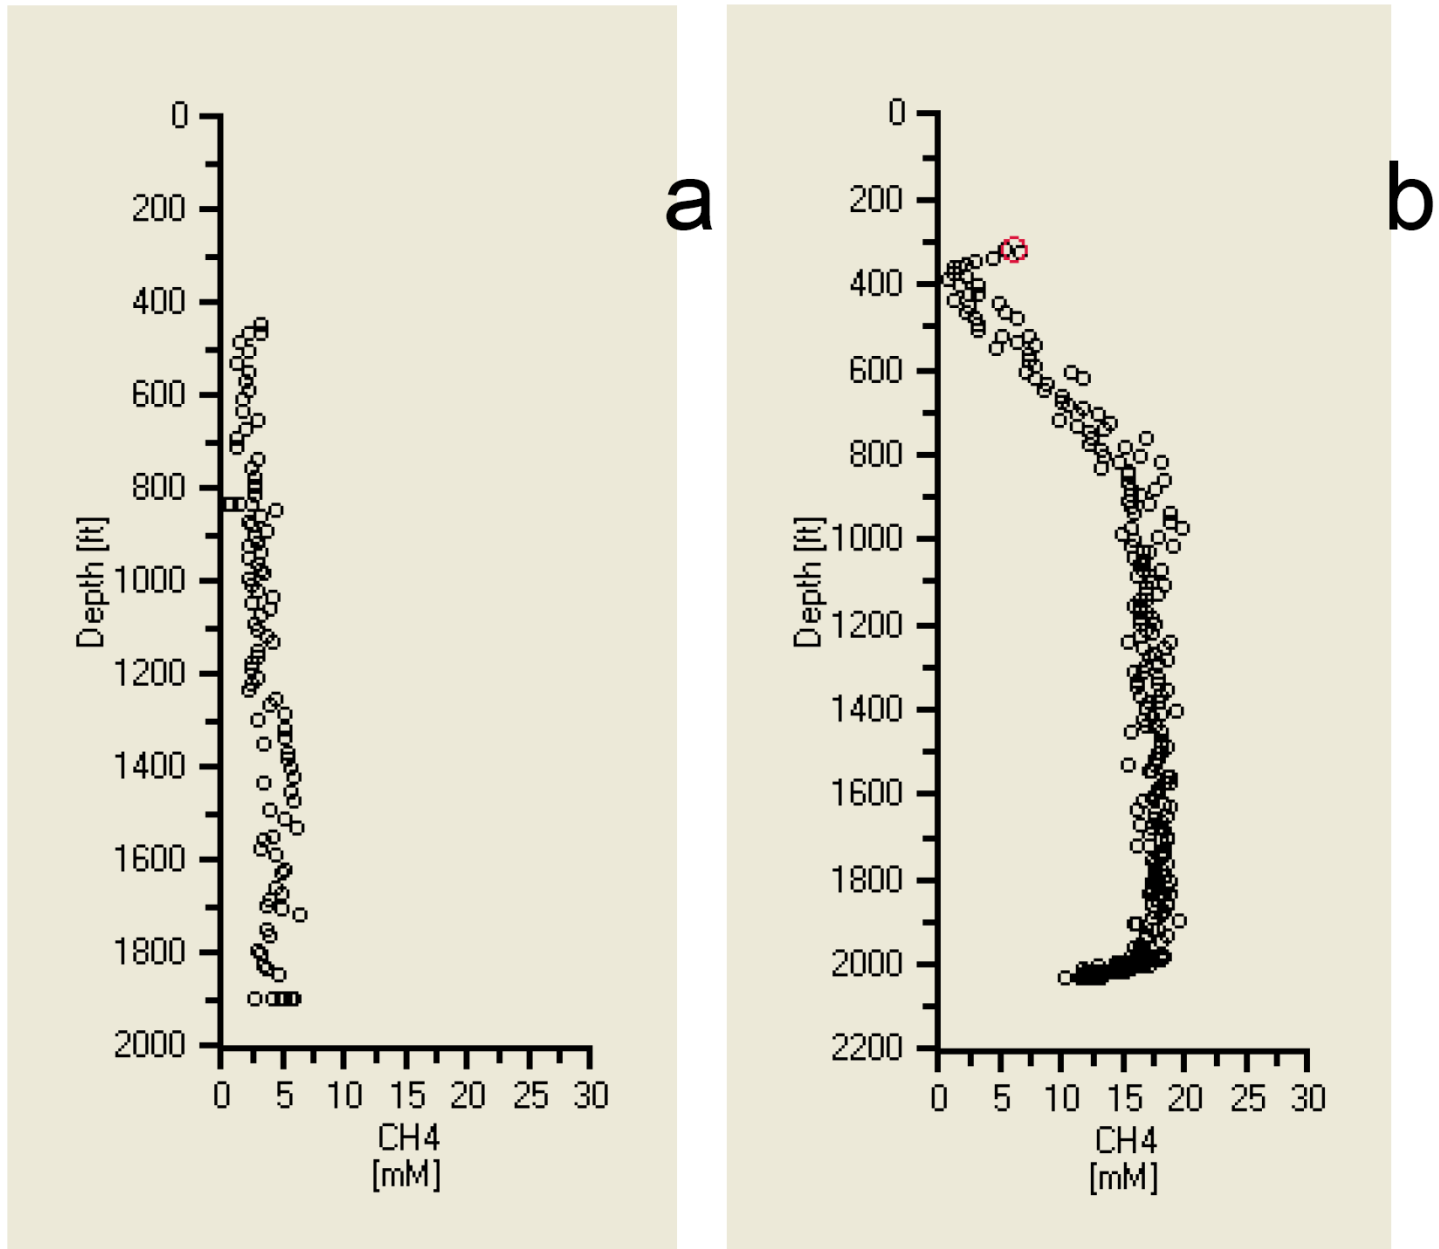


Figure 11. Log of solution gas in (a) a coalbed methane well that contains “city” water and (b) a coalbed methane well that contains reservoir fluid.



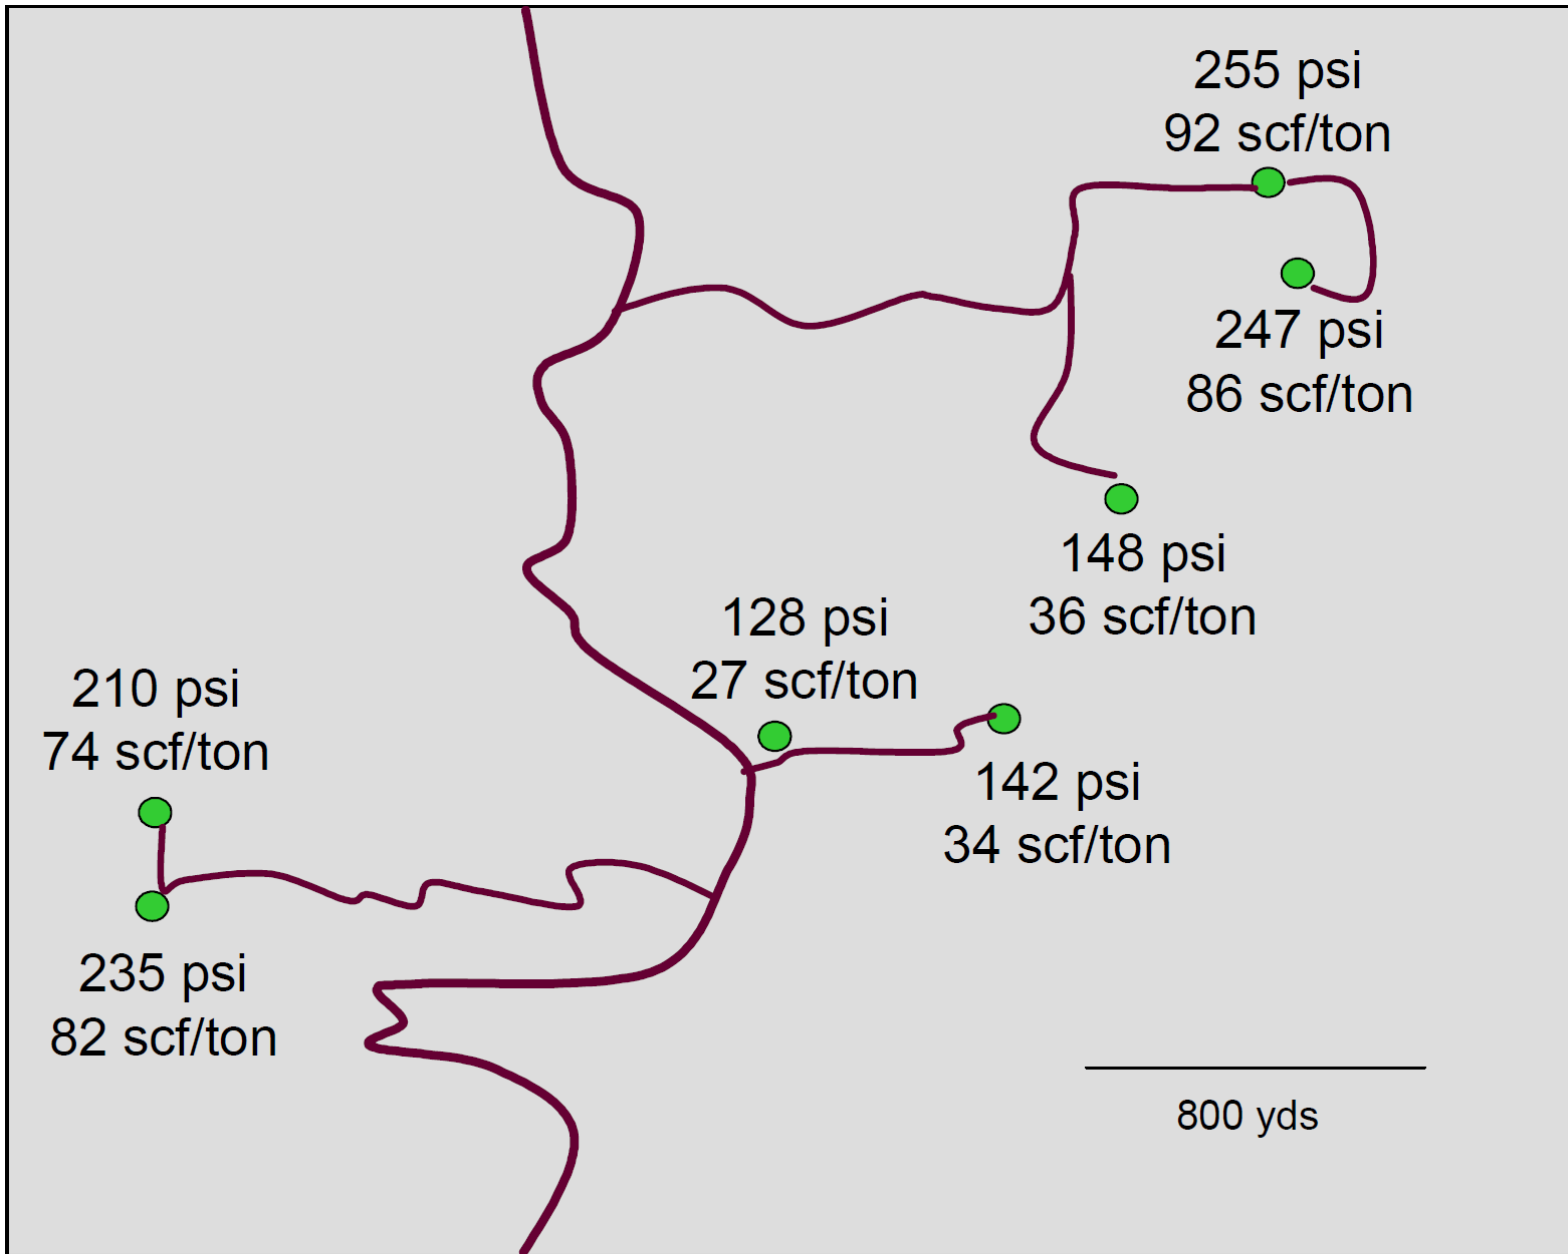


Figure 12. Results of a field survey of critical desorption pressure (in psi) and gas content (in scf/ton) using WellDog's Raman instrument and Critical Gas Content method. Scale is shown at bottom.

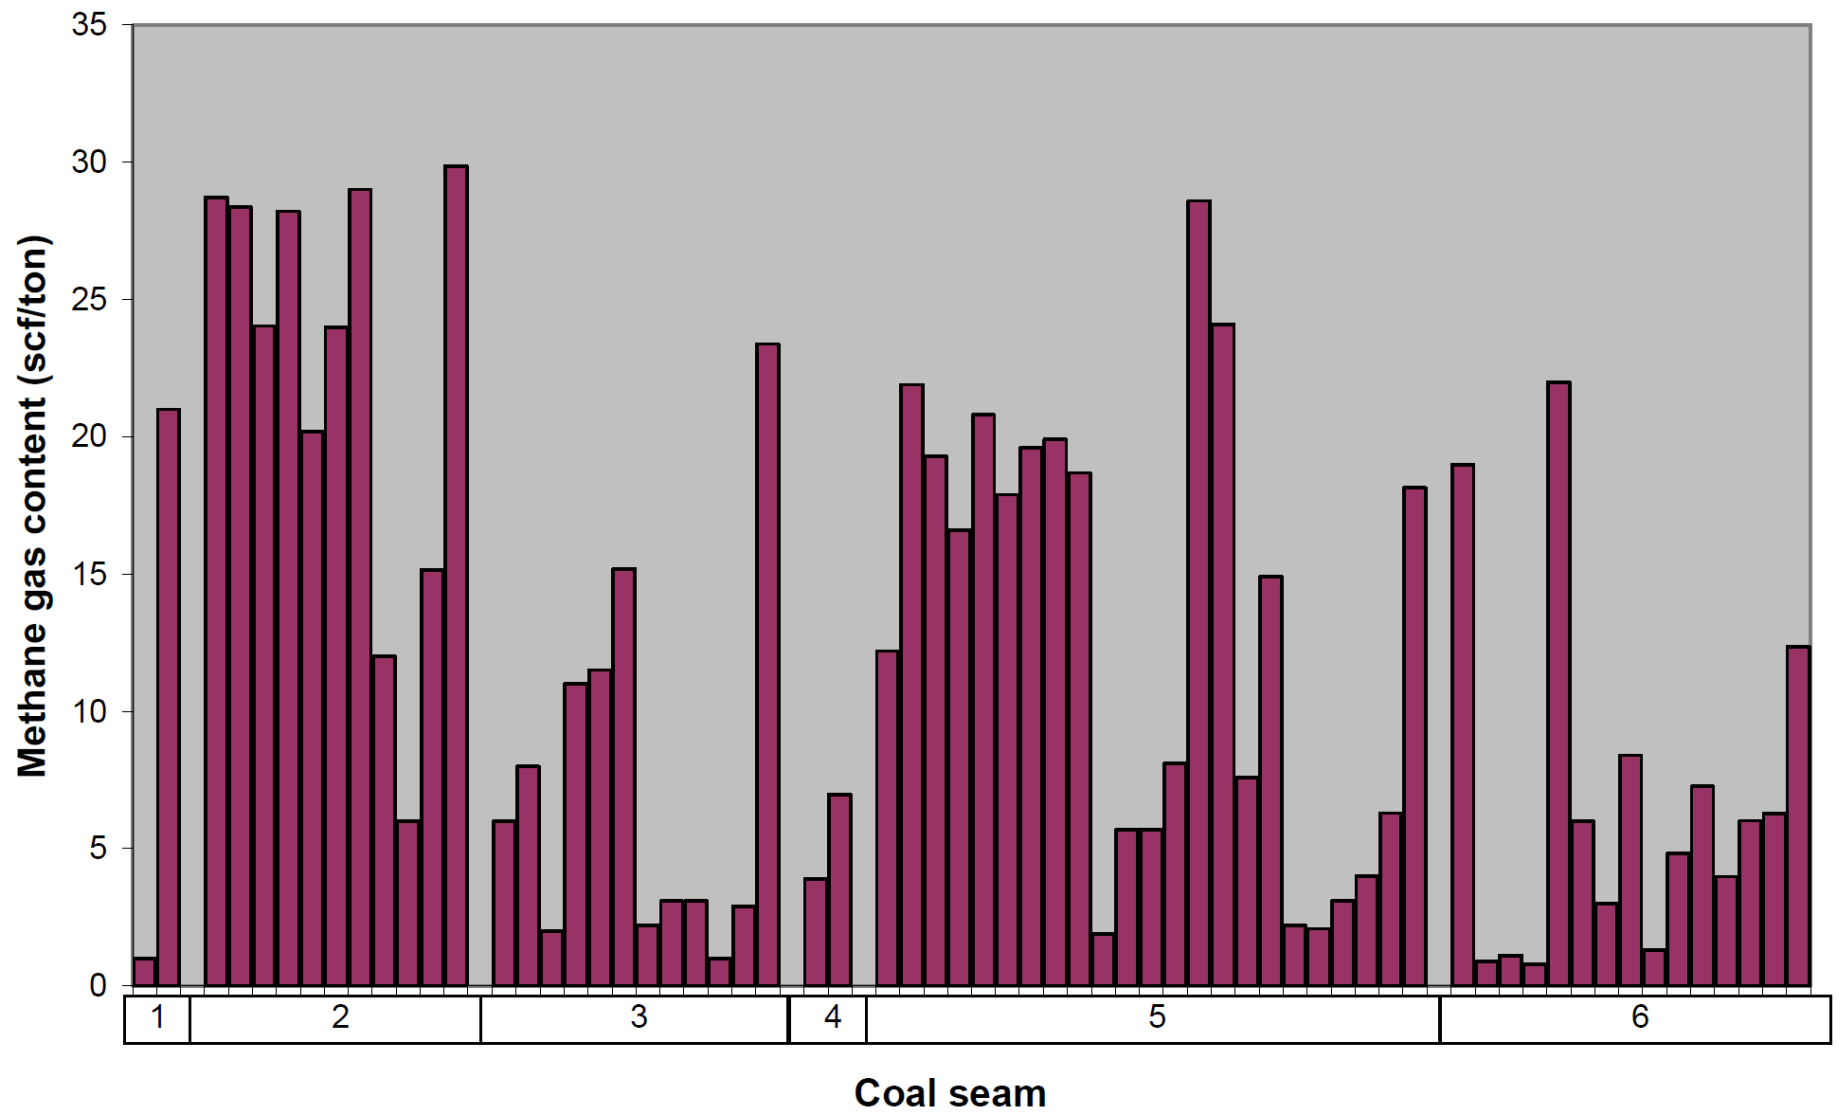


Figure 13. Results of gas content performed on 45 coalbed reservoirs in six different coal seams in the Powder River basin using WellDog's Raman instrument and Critical Gas Content method.